



**PROFESSIONAL. RELIABLE.
DYNAMIC.**

2026 · EXPANDED EDITION

PRODUCT CATALOGUE

The complete Inforce brand range: cordless and corded power tools, consumables, hand tools, measuring tools, storage systems, power equipment and workshop machinery.

**JIANGSU SKYLINE INDUSTRIAL CO.,
LTD.**

Development District, Danyang City,
Jiangsu Province, China
skyline-tools.com | +0086-511-86225266 |
info@skyline-tools.com

WHO WE ARE

INFORCE is a professional tool brand engineered for people who can't afford downtime.

PROFESSIONAL

Built to trade-grade specification, tested for daily jobsite and workshop use – not weekend DIY.

RELIABLE

Consistent performance across a 600+ SKU range, backed by a single 18V/21V max battery platform.

DYNAMIC

A fast-growing, category-spanning line-up – from cordless power tools to workshop machinery.

6

PRODUCT CATEGORIES

600+

SKU IN THE RANGE

18V / 21V
max

LI-ION BATTERY
PLATFORM

2026

EXPANDED EDITION

From the 18V/21V max cordless platform to corded power tools, consumables, hand tools, measuring instruments, storage systems and workshop power equipment, every product in this catalogue is held to one standard – professional-grade build quality, reliable performance shift after shift, and dynamic enough to keep pace with demanding job sites.



PROFESSIONAL · RELIABLE · DYNAMIC

THE BRAND

CORE STRENGTHS

Four things that set the brand apart.

10+

YEARS ON THE MARKET

Over a decade on the market.

EU

TEAM & APPROACH

A strong, ambitious team that follows a European approach to design, quality control and service

R&D

MODERN TECHNOLOGY

Continuous investment in up-to-date manufacturing methods and product technology, applied consistently across the whole range.

CN

OWN WAREHOUSES IN CHINA

In-house warehousing in China – not third-party storage – keeps supply reliable and lead times short and predictable.

INFORCE – the best-balanced tool lineup in its class, built on real feedback from working pros



CONTENTS

INFORCE – a brand built for professionals: cordless and corded power tools, consumables, hand tools, measuring tools, storage systems, workshop machinery and power equipment.

01	CORDLESS & CORDED POWER TOOLS	33 SKU	5
02	CONSUMABLES & ACCESSORIES	224 SKU	15
03	HAND TOOLS	156 SKU	37
04	MEASURING TOOLS & STORAGE SYSTEMS	90 SKU	66
05	MACHINERY & WORKSHOP EQUIPMENT	19 SKU	83
06	POWER EQUIPMENT	49 SKU	89
	Product index	571 SKU	103



INFORCE

SECTION / 01

CORDLESS & CORDED POWER TOOLS

Drills, hammer drills, saws, angle grinders, routers, and the 18V/21V max Li-Ion battery platform



CORDED (MAINS-POWERED) TOOLS

Angle Grinder 125 mm (base)

AG5008A

- Compact 125 mm angle grinder for household and light professional work
- Comfortable grip, disc guard

Voltage	230 V
Power	850 W
Disc diameter	125 mm
Bore diameter	22.2 mm



CORDED (MAINS-POWERED) TOOLS

Angle Grinder 125 mm (economy)

AG5007

- Lightest, most affordable angle grinder in the Inforce 125 mm range
- Brushed motor – see AG5015ACSV-BL for the brushless (BL) upgrade

Voltage	230 V
Power	720 W
Disc diameter	125 mm
Bore diameter	22.2 mm



CORDED (MAINS-POWERED) TOOLS

Angle Grinder 125 mm (entry)

AG9020

- Entry-level corded angle grinder, sibling of the AG5008A/AG5015ACSV-BL range
- Compact 2-position side handle, spindle lock for quick disc changes

Voltage	230 V
Power	2000 W
Disc diameter	230 mm
Bore diameter	22.2 mm



CORDED (MAINS-POWERED) TOOLS

Angle Grinder 125 mm, Brushless (base BL)

AG5015ACS-BL

- Brushless 125 mm angle grinder – non-variable-speed sibling of AG5015ACSV-BL
- Longer motor life and better efficiency than brushed AG5007/AG5008A

Voltage	230 V
Power	1500 W
Disc diameter	125 mm
Bore diameter	22.2 mm



CORDED (MAINS-POWERED) TOOLS

Angle Grinder 125 mm, Brushless (BL)

AG5015ACSV-BL

- 125 mm angle grinder with a brushless motor – longer life, higher efficiency
- Soft start and speed control (ACSV)

Voltage	230 V
Power	1500 W
Disc diameter	125 mm
Bore diameter	22.2 mm



CORDED (MAINS-POWERED) TOOLS

Angle Grinder 230 mm

AG9022S

- Large-diameter (230 mm) angle grinder for heavy cutting and grinding
- Two-handed ergonomics, disc guard

Voltage	230 V
Power	2200 W
Disc diameter	230 mm
Bore diameter	22.2 mm



CORDED (MAINS-POWERED) TOOLS

Router

RT7022ASV

- Router for profiling wood, grooves and edges
- Soft start, electronic speed control

Power	2200 W
Speed	9000-22000 rpm
Max speed	22000 rpm
Cable length	2.5 m



CORDED (MAINS-POWERED) TOOLS

Circular Saw

DS1915

- Professional circular saw for wood, plastic and light building materials
- Cast-aluminium ribbed base plate

Power	1400 W
Disc diameter	185 mm
Diameter (inch)	7 1/4
Disc bore diameter	30 mm
Speed	5130 rpm



CORDED (MAINS-POWERED) TOOLS

Demolition Hammer

DH4517

- Powerful demolition hammer for breaking up concrete structures
- Die-cast magnesium-alloy housing, D-handle with adjustable angle

Power	1700 W
Cable length	5 m
Dimensions (unpackaged)	733x124x234 mm
Net weight	16.01 kg
Grade	Professional



CORDED (MAINS-POWERED) TOOLS

Drill, Impact

RD1307RV-I

- Higher-power impact drill, 2 speeds, reverse
- Includes side handle and depth stop

Power	750 W
Max no-load speed	2000 rpm
Max drilling diameter (metal)	13 mm
Max drilling diameter (wood)	40 mm
Max drilling diameter (brick)	0 mm



CORDED (MAINS-POWERED) TOOLS

Drill, Non-Impact

RD1005RV

- Non-impact drill for wood and metal, soft start, reverse built into the trigger
- Two-component non-slip grip, labyrinth-style motor ventilation

Power	470 W
Max no-load speed	3100 rpm
Max drilling diameter (wood)	25 mm
Max drilling diameter (metal)	10 mm
Max torque	1.02 Nm



CORDED (MAINS-POWERED) TOOLS

Edge Router

RT3807ACSV

Power	710 W
Collet size	6.6 mm
Max. cutter diameter	30 mm
Working stroke (travel)	38 mm
Max. speed	30,000 rpm



CORDED (MAINS-POWERED) TOOLS

Heat Gun

HG6520D

- Heat gun for heat-shrink work, paint removal, pipe soldering
- Digital temperature display, smooth adjustment

Power	2000 W
Air consumption	250-550 l/min
Cable length	2.5 m
Net weight	0.72 kg



CORDED (MAINS-POWERED) TOOLS

Heat Gun (base)

HG6518

- Entry-level heat gun – base version of the HG6520D (digital display)
- For paint stripping, shrink-wrap, pipe bending and thawing

Power	1800 W
Air consumption	250-500 l/min
Cable length	2.5 m
Net weight	0.56 kg



CORDED (MAINS-POWERED) TOOLS

Jigsaw

JS0975FV-T

- Pendulum-action jigsaw with LED work light and dust blower
- Tool-free blade change, die-cast base plate

Power	750 W
Pendulum (orbital) action	Yes
Blade stroke	26 mm
Stroke rate	800-2850 strokes/min
Max stroke rate	2850 strokes/min



CORDED (MAINS-POWERED) TOOLS

Miter Saw, 305 mm (flagship)

MS1218EL-S

- Largest-diameter miter saw in the range for wide-stock cross-cuts
- Rotating table, stable base

Supply voltage	230 V
Power	1500 W
Disc diameter	305 mm
Diameter (inch)	12



CORDED (MAINS-POWERED) TOOLS

Miter Saw, Laser, 254 mm

MS1018EFL

- Miter saw with laser guide for precise cross-cuts
- Rotating table for angled cuts

Supply voltage	230 V
Power	1800 W
Disc diameter	254 mm
Diameter (inch)	10



CORDED (MAINS-POWERED) TOOLS

Miter Saw, Laser, 254 mm (S variant)

MS1018EFL-S

- "S" modification of the MS1018EFL – same 254 mm blade and laser guide
- Mid-range option between the 254 mm and flagship 305 mm (MS1218EL-S) saws

Supply voltage	230 V
Power	1800 W
Disc diameter	254 mm
Diameter (inch)	10



CORDED (MAINS-POWERED) TOOLS

Random-Orbit Sander

ES5003V

- Random-orbit sander for finishing wood, metal and paintwork
- Speed control, dust extraction

Power	350 W
Voltage	230 V
Disc diameter	125 mm
Speed	5000-13000 rpm



CORDED (MAINS-POWERED) TOOLS

Reciprocating Saw

RS2115V

- Professional reciprocating saw for wood, metal and plastic
- Tool-free blade change, universal blade mount

Power	1200 W
No-load stroke rate	0-3000 strokes/min
Max no-load stroke rate	3000
Stroke length	30 mm
Cable length	2.5 m



CORDED (MAINS-POWERED) TOOLS
Rotary Hammer, SDS-max

RH4014CSV-M

- Powerful SDS-max rotary hammer for intensive professional use
- Heavy-duty range – for high-volume drilling and chiselling

Power	1350 W
Max drilling diameter (wood)	42 mm
Max drilling diameter (metal)	12 mm
Max drilling diameter, core bit (brick)	105 mm



CORDED (MAINS-POWERED) TOOLS
Rotary Hammer, SDS-plus

RH2608R-P

- Light-duty rotary hammer for masonry and concrete installation work
- Gearbox housing in aluminium alloy, VDE cable 4 m

Power	800 W
Max drilling diameter (wood)	32 mm
Max drilling diameter (metal)	13 mm
Max drilling diameter, core bit (brick)	60 mm
Max drilling diameter, bit (brick)	26 mm



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)
Battery, 18V/21V max, 2000 mAh

CB20

- Compact, lightest battery on the 18V/21V max platform
- Compatible with the full CD/CID/CIW/CAG/CRH/CRS/CDS/CISD cordless range

Voltage	18 V (21 V max)
Capacity	2000 mAh
Cell type	Li-Ion 18650



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)
Battery, 18V/21V max, 5000 mAh

CB50

- Mid-capacity battery – balance of runtime and weight

Voltage	18 V (21 V max)
Capacity	5000 mAh
Cell type	Li-Ion 18650



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)

Charger, Standard

C4

- Standard charger for the 18V/21V max battery platform (CB20/CB40/CB50)

Input	100-240 V
Output	21.5 V
Mounting spacing	70 mm



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)

Drill-Driver, Cordless

CD60-2-2-BL

- Cordless drill-driver, no impact function
- Brushless (BL) motor – longer service life

Voltage	18 V (21 V max)
Chuck	keyless 1.5-13 mm
No-load speed	0-450 / 0-1750 rpm
Max torque	60 Nm
Speed settings	2



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)

Impact Drill-Driver (base)

CID60-2-2-BL

- Cordless impact drill-driver, brushless motor
- Hammer mode for masonry and concrete

Voltage	18 V (21 V max)
Chuck	keyless 1.5-13 mm
No-load speed	0-450 / 0-1750 rpm
Impact rate	up to 26,250 bpm
Max torque	60 Nm



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)

Impact Drill-Driver (flagship, 150 Nm)

CID150-2-4-BL

- Range-topping impact drill-driver – increased max torque of 150 Nm
- No-load current 6.6-7.5 A – the most powerful motor in the group

Voltage	18 V (21 V max)
Chuck	keyless 1.5-13 mm
No-load speed	0-550 / 0-2200 rpm
Impact rate	up to 33,000 bpm
Max torque	150 Nm



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)

Impact Wrench 1350 Nm (flagship)

CIW1350-0-BL

- Range-topping impact wrench – 1350 Nm fastening torque
- 3 speeds, 1200 W peak power

Drive	1/2"
No-load speed	1100/1500/1800 rpm
Impact rate	1000/1600/2200 bpm
Max fastening torque	1350 Nm
Breakaway torque	1800 Nm



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)

Impact Wrench 420 Nm

CIW420-2-4-BL

- Compact impact wrench for light-to-medium tasks
- 2 speeds

Drive	1/2"
No-load speed	1850 / 2450 rpm
Impact rate	2800 / 3500 bpm
Max fastening torque	420 Nm
Breakaway torque	600 Nm



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)

Impact Wrench 850 Nm

CIW850-2-4-BL

- Mid-power wrench in the range
- 3 speeds

Drive	1/2"
No-load speed	1400/1900/2400 rpm
Impact rate	1800/2200/2800 bpm
Max fastening torque	850 Nm
Breakaway torque	1100 Nm



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)

Rotary Hammer, Cordless

CRH22-2-4-BL

- Cordless SDS-plus rotary hammer, 3 modes (drill/hammer-drill/chisel)
- Compact and light – for cable-free operation

Shank	SDS-plus
No-load speed	0-1600 rpm
Impact rate	0-5500 bpm
Impact energy	2.2 J
Max dia. (concrete/metal/wood)	13 / 13 / 28 mm



CORDLESS TOOLS (18V/21V MAX LI-ION PLATFORM)

Angle Grinder 125 mm, Cordless

CAG125-2-5-BL

- Cordless 125 mm angle grinder, brushless motor
- 6 speed steps plus an auto-adaptive mode

Voltage	18 V (21 V max)
Disc diameter	125 mm
No-load speed	Auto 1500-9500 / 3500 / 5000 / 6500 / 8000 / 10000 rpm
Speed settings	6
Power	800 W

INFORCE



SECTION / 02

CONSUMABLES & ACCESSORIES

Discs, drill bits, core bits, belts, blades, bits, and other power-tool accessories



BIT
Bit PH2x25mm 2 pcs

11-01-289

– One of 11 sizes/variants in the Inforce "Bit" family – see the full range table for the rest

Bit type	Single-sided
Tip	PH2
Length	25 mm
Number of bits	2 pcs
Bit shank	1/4" (type C)



BIT
Bit PH2x25mm 5 pcs

11-01-290

– One of 11 sizes/variants in the Inforce "Bit" family – see the full range table for the rest

Bit type	Single-sided
Tip	PH2
Length	25 mm
Number of bits	5 pcs
Bit shank	1/4" (type C)



BIT
Bit Set with Holder, 56 pcs

11-01-288

– Comprehensive 56-piece driver bit set covering PH/PZ/SL/TORX/HEX profiles
– Smaller 11 and 14-piece sets also available – see the full range table

Bit length	75 mm
Bit material	S2
Bit shank	1/4 (type with)/1/4 (type E)
Number of bits	56 pcs
Bit type	Single-sided
Bit tip shape	PH, PZ, SL, T(TX), TT(TR/TH), HEX
Slot types	PH1; PH2; PH3; PZ1; PZ2; PZ3; SL4; SL5; SL6; HEX3; HEX4; HEX5; T10; T15; T20; T25; T27; T30; T40; TR10; TR15; TR20; TR25; TR27; TR30; TR40
Colour slot marking	Yes
Case	Yes



BITS
Bits Ph2x150, steel S2, 5pcs

11-01-377

– One of 7 sizes/variants in the Inforce "Bits" family – see the full range table for the rest
– Packed 60 pcs per carton


Length	150 mm
Fits power screwdriver	Yes
Bit shank	1/4" (type E)
Bit material	S2
Number of bits	5 pcs
Bit type	Single-sided
Bit tip shape	PH
Tip	PH2
Magnetic bit tip	Yes
Phillips (PH)	Yes



BITS
Bits Ph2x70, steel S2, 10pcs
11-01-378

- One of 7 sizes/variants in the Inforce "Bits" family – see the full range table for the rest
- Packed 120 pcs per carton

Length	70 mm
Fits power screwdriver	Yes
Bit shank	1/4" (type E)
Bit material	S2
Number of bits	10 pcs
Bit type	Single-sided
Bit tip shape	PH
Tip	PH2
Magnetic bit tip	Yes
Phillips (PH)	Yes

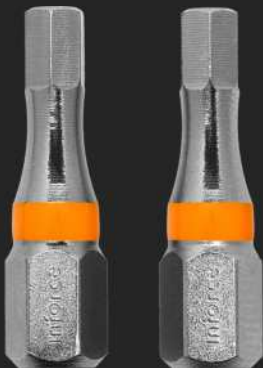

HEX BIT
Hex bit insert HEX4 L 25 2pcs in pack
11-01-373

- Standalone item in the Inforce consumables/hand tools range

Bit type	Single-sided
Tip	HEX4
Length	25 mm
Number of bits	2 pcs
Bit shank	1/4" (type C)
Impact (torsion) bit	No
Depth stop	No
Bit material	S2
Torx (TT)	No
Net weight	0.015 kg



BITS
Bits PH2x90, steel S2, 10pcs
11-01-383

- One of 7 sizes/variants in the Inforce "Bits" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	90 mm
Fits power screwdriver	Yes
Bit shank	1/4" (type E)
Bit material	S2
Number of bits	10 pcs
Bit type	Single-sided
Bit tip shape	PH
Tip	PH2
Magnetic bit tip	Yes
Phillips (PH)	Yes



IMPACT BITS
Impact bits Impact PH2, 50 mm, 10 pcs
11-01-375

- Standalone item in the Inforce consumables/hand tools range
- Packed 120 pcs per carton

Length	50 mm
Fits power screwdriver	Yes
Bit shank	1/4" (type E)
Bit material	S2
Number of bits	10 pcs
Bit type	Single-sided
Bit tip shape	PH
Tip	PH2
Magnetic bit tip	Yes
Impact (torsion) bits	Yes



LONG IMPACT

Long impact socket set 1/2" 10-24 mm

11-01-263

– One of 3 sizes/variants in the Inforce "Long Impact" family – see the full range table for the rest

Drive type	Square with hole
Number of pieces	11 pcs
Drive size	1/2"
Measurement system	Metric
Tip	Internal hex
Min socket size	10 mm
Max socket size	24 mm
Impact	Yes
Material	CrMo
Deep	Yes



LONG IMPACT

Long impact socket set 1/2" 10-32 mm

11-01-264

– One of 3 sizes/variants in the Inforce "Long Impact" family – see the full range table for the rest

Drive type	Square with hole
Number of pieces	15 pcs
Drive size	1/2"
Measurement system	Metric
Tip	Internal hex
Min socket size	10 mm
Max socket size	32 mm
Impact	Yes
Material	CrMo
Deep	Yes



LONG IMPACT

Long impact socket set 1/2" 17, 19.21 mm

11-01-262

– One of 3 sizes/variants in the Inforce "Long Impact" family – see the full range table for the rest

Drive type	Square with hole
Number of pieces	3 pcs
Drive size	1/2"
Measurement system	Metric
Tip	Internal hex
Min socket size	17 mm
Max socket size	21 mm
Impact	Yes
Material	CrMo
Deep	Yes




SCREWDRIVER

Screwdriver bit PH1 L=50mm 2pcs in pack

11-01-380

– One of 8 sizes/variants in the Inforce "Screwdriver" family – see the full range table for the rest

Bit type	Single-sided
Tip	PH1
Length	50 mm
Number of bits	2 pcs
Bit shank	1/4" (type E)
Impact (torsion) bit	No
Depth stop	No
Bit material	S2
Torx (TT)	No
Net weight	0.022 kg



SCREWDRIVER

Screwdriver bit PH2 L=150mm 5pcs in pack

11-01-382

– One of 8 sizes/variants in the Inforce "Screwdriver" family – see the full range table for the rest

Bit type	Single-sided
Tip	PH2
Length	150 mm
Number of bits	5 pcs
Bit shank	1/4" (type E)
Impact (torsion) bit	No
Depth stop	No
Bit material	S2
Torx (TT)	No
Net weight	0.13 kg



SCREWDRIVER

Screwdriver bit PH2 L=50mm 10 pcs in pack

11-01-384

– One of 8 sizes/variants in the Inforce "Screwdriver" family – see the full range table for the rest

Bit type	Single-sided
Tip	PH2
Length	50 mm
Number of bits	10 pcs
Bit shank	1/4" (type E)
Impact (torsion) bit	No
Depth stop	No
Bit material	S2
Torx (TT)	No
Net weight	0.11 kg




BURR

Burr set 5pcs

11-01-332

– Standalone item in the Inforce consumables/hand tools range
– Packed 25 pcs per carton

Shank diameter	6 mm
Shank diameter 1	6 mm
Shank diameter 2	6 mm
Min diameter	10 mm
Max diameter	10 mm
Attachment material	Carbide
Quantity	5 pcs
Processing type	Thread/Engraved/Milling
Accessory type	Burr cutter
For wood	Yes



CARBIDE DRILL

Carbide Drill Bit Set, SDS-plus, 10 pcs

11-03-10-1

– Carbide-tipped masonry bit set covering the common 5-12 mm range
– For rotary hammers with an SDS-plus chuck

Max bit diameter	12 mm
Min bit diameter	5 mm
Max bit length	160 mm
Net weight	0.6 kg
Dimensions (unpacked)	160x12 mm
Shank type	SDS-plus
Number of pieces	10 pcs
Included in set	Drill bits
Number of points (facets)	2



CONCRETE DRILL

Concrete drill bit set 5 pcs. D 4; 5; 6; 8; 10 mm

11-01-901-5

- One of 2 sizes/variants in the Inforce "Concrete Drill" family – see the full range table for the rest
- Packed 50 pcs per carton

Min diameter	4 mm
Max shank diameter	10 mm
Max drill bit diameter	10 mm
Max length	120 mm
Material worked	Concrete/Brick
Shank type	Cylindrical
Drill bit material	YG8C
Number of pieces	5 pcs
Type	Twist (spiral)
Packaging kind	Plastic case with hanging loop



CONCRETE DRILL

Concrete drill bit set 8 pcs. D 3-10 mm

11-01-902-8

- One of 2 sizes/variants in the Inforce "Concrete Drill" family – see the full range table for the rest
- Packed 50 pcs per carton

Min diameter	3 mm
Max shank diameter	10 mm
Max drill bit diameter	10 mm
Max length	120 mm
Material worked	Concrete/Brick
Shank type	Cylindrical
Drill bit material	YG8C
Number of pieces	8 pcs
Type	Twist (spiral)
Packaging kind	Plastic case with hanging loop



COUNTERSINK

Countersink set 90 g. 6.3-20.5 mm HSS-G 6pcs

11-01-421

- Standalone item in the Inforce consumables/hand tools range
- Packed 20 pcs per carton

Diameter	20.5 mm
Shank diameter	10 mm
Length	63 mm
Working length	15 mm
Shank type	Cylindrical
Shank	Cylindrical/Hexagonal
Material worked	Metal
Countersink material	HSS
Pack quantity	6 pcs
Type	Countersink set



METAL DRILL

Metal Drill Bit Set HSS, 19 pcs (1-10 mm)

11-01-329

- Full-range HSS metal drill bit set in a hardened case
- Larger 25-piece HSS-Co sets and single bits also available – see the full range table

Min diameter	1 mm
Max shank diameter	10 mm
Max drill bit diameter	10 mm
Max length	87 mm
Material worked	Metal
Shank type	Cylindrical
Drill bit material	HSS
Number of pieces	19 pcs
Type	Twist (spiral)



METAL DRILL

Metal drill bits, ground, double-ended, HSS-G, 3.2x12/49 10 pcs

11-01-727

- One of 51 sizes/variants in the Inforce "Metal Drill" family – see the full range table for the rest
- Packed 500 pcs per carton

Diameter	3.2 mm
Shank diameter	3.2 mm
Length	49 mm
Working length	12 mm
Shank type	Cylindrical
Material worked	Metal
Drill bit material	HSS-G
Pack quantity	10 pcs
Type	Spiral, double-ended



METAL DRILL

Metal drill bits, ground, double-ended, HSS-G, 5.0x18/62 10 pcs

11-01-728

- One of 51 sizes/variants in the Inforce "Metal Drill" family – see the full range table for the rest
- Packed 250 pcs per carton

Diameter	5 mm
Shank diameter	5 mm
Length	62 mm
Working length	18 mm
Shank type	Cylindrical
Material worked	Metal
Drill bit material	HSS-G
Pack quantity	10 pcs
Type	Spiral, double-ended



STEP DRILL

Step drill bit 4-20mm M42

11-01-489

- One of 4 sizes/variants in the Inforce "Step Drill" family – see the full range table for the rest
- Packed 125 pcs per carton

Diameter	20 mm
Step drill diameter range	4-20 mm
Shank diameter	8 mm
Length	71 mm
Working length	49 mm
Shank type	Cylindrical with 3 faces
Material worked	Metal
Drill bit material	HSS M42
Pack quantity	1 pcs
Type	Stepped, straight-flute



STEP DRILL

Step drill bit 4-30mm M42

11-01-490

- One of 4 sizes/variants in the Inforce "Step Drill" family – see the full range table for the rest
- Packed 50 pcs per carton

Diameter	30 mm
Step drill diameter range	4-30 mm
Shank diameter	10 mm
Length	84 mm
Working length	72 mm
Shank type	Cylindrical with 3 faces
Material worked	Metal
Drill bit material	HSS M42
Pack quantity	1 pcs
Type	Stepped, straight-flute



STEP DRILL

Step drill bit 6-20mm M42

11-01-491

- One of 4 sizes/variants in the Inforce "Step Drill" family – see the full range table for the rest
- Packed 125 pcs per carton

Diameter	20 mm
Step drill diameter range	6-20 mm
Shank diameter	8 mm
Length	70 mm
Working length	47 mm
Shank type	Cylindrical with 3 faces
Material worked	Metal
Drill bit material	HSS M42
Pack quantity	1 pcs
Type	Stepped, straight-flute



WOOD DRILL

Wood drill bit set 5pcs

11-01-401-5

- Standalone item in the Inforce consumables/hand tools range
- Packed 100 pcs per carton

Min diameter	4 mm
Max shank diameter	10 mm
Max drill bit diameter	10 mm
Max length	120 mm
Material worked	Wood
Shank type	Cylindrical
Drill bit material	Steel 45
Number of pieces	5 pcs
Type	Twist (spiral)
Packaging kind	Plastic case with hanging loop



HEX SOCKET

Hex socket 1/2 DR 10mm

11-01-473

- One of 24 sizes/variants in the Inforce "Hex Socket" family – see the full range table for the rest

Drive type	Spring-loaded ball square
Drive size	1/2"
Measurement system	Metric
Socket size	10 mm
Tip shape	Internal (box-end) hex



HEX SOCKET

Hex socket 1/2 DR 12mm

11-01-475

- One of 24 sizes/variants in the Inforce "Hex Socket" family – see the full range table for the rest

Drive type	Spring-loaded ball square
Drive size	1/2"
Measurement system	Metric
Socket size	12 mm
Tip shape	Internal (box-end) hex



HEX SOCKET

Hex socket 1/2 DR 13mm

11-01-476

– One of 24 sizes/variants in the Inforce "Hex Socket" family – see the full range table for the rest

Drive type	Spring-loaded ball square
Drive size	1/2"
Measurement system	Metric
Socket size	13 mm
Tip shape	Internal (box-end) hex



IMPACT SOCKET

Impact socket 1" DR 36 mm

11-01-634

– One of 8 sizes/variants in the Inforce "Impact Socket" family – see the full range table for the rest

Drive type	Square with hole
Socket type	Standard
Drive size	1"
Socket size	36 mm
Tip shape	Internal (box-end) hex



IMPACT SOCKET

Impact socket 1/2" DR, 13mm

11-01-623

– One of 8 sizes/variants in the Inforce "Impact Socket" family – see the full range table for the rest

Drive type	Square with hole
Socket type	Standard
Drive size	1/2"
Socket size	13 mm
Tip shape	Internal (box-end) hex



IMPACT SOCKET

Impact socket set 1/2" 10-24 mm

11-01-261

– One of 8 sizes/variants in the Inforce "Impact Socket" family – see the full range table for the rest

Drive type	Square with hole
Number of pieces	10 pcs
Drive size	1/2"
Measurement system	Metric
Tip	Internal hex



NON-IMPACT SOCKET

Non-impact socket set 1/2" 10-22 mm

11-01-259

– One of 4 sizes/variants in the Inforce "Non-Impact Socket" family – see the full range table for the rest

Drive type	Spring-loaded ball square
Socket type	Standard
Number of pieces	12 pcs
Drive size	1/2"
Min socket size	10 mm
Max socket size	22 mm
Measurement system	Metric
Material	CrV
Impact	No
Deep	No



NON-IMPACT SOCKET

Non-impact socket set 1/2" 10-27 mm

11-01-258

– One of 4 sizes/variants in the Inforce "Non-Impact Socket" family – see the full range table for the rest

Drive type	Spring-loaded ball square
Socket type	Standard
Number of pieces	9 pcs
Drive size	1/2"
Min socket size	10 mm
Max socket size	27 mm
Measurement system	Metric
Material	CrV
Impact	No
Deep	No



NON-IMPACT SOCKET

Non-impact socket set 1/2" 8-32 mm

11-01-260

– One of 4 sizes/variants in the Inforce "Non-Impact Socket" family – see the full range table for the rest

Drive type	Spring-loaded ball square
Socket type	Standard
Number of pieces	17 pcs
Drive size	1/2"
Min socket size	8 mm
Max socket size	32 mm
Measurement system	Metric
Material	CrV
Impact	No
Deep	No



DIAMOND CORE

Diamond core bit for concrete 68 mm

11-02-068

– One of 2 sizes/variants in the Inforce "Diamond Core" family – see the full range table for the rest
– Packed 20 pcs per carton

Diameter	68 mm
Bore diameter	M16
Overall length	105 mm
Length	60 mm
Working length	60 mm
Dimensions (unpacked)	105x68x68 mm
Net weight	0.47 kg
Shank type	SDS-plus
Shank	Yes
Number of cutting elements	4 pcs



DIAMOND CORE

Diamond Core Bit for Concrete, 72 mm

11-02-072

- Diamond core bit for drilling clean round holes in concrete
- Also available in 68 mm – see the full range table

Diameter	72 mm
Bore diameter	M16
Overall length	105 mm
Length	60 mm
Working length	60 mm
Dimensions (unpacked)	105x72x72 mm
Net weight	0.48 kg
Shank type	SDS-plus
Shank	Yes
Number of cutting elements	4 pcs



DIAMOND CUTTING

Diamond cutting disc for concrete 180x22, 23x 3.2X12mm

11-01-5102

- One of 5 sizes/variants in the Inforce "Diamond Cutting" family – see the full range table for the rest
- Packed 50 pcs per carton

Diameter	180 mm
Diameter (inch)	7
Bore diameter	22.2 mm
Bore diameter 1	22.2 mm
Bore diameter 2	22.2 mm
Thickness	3.2 mm
Diamond segment height	12 mm
Number of segments	14 pcs
Pack quantity	1 pcs




DIAMOND CUTTING

Diamond cutting disc 160x12x1.8x22.2 mm

05-13-08

- One of 5 sizes/variants in the Inforce "Diamond Cutting" family – see the full range table for the rest
- Packed 100 pcs per carton

Outer diameter	160 mm
Bore diameter	12 mm
Thickness	1.8 mm
Bearing	No
Net weight	0.2 kg

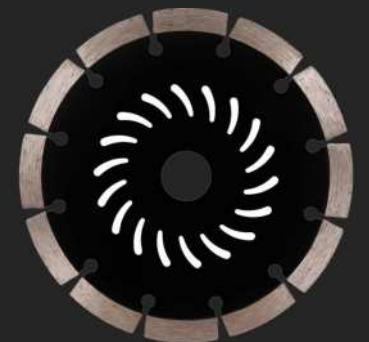

DIAMOND CUTTING

Diamond cutting disc for reinforced concrete 150x22.23 x3.2mm

11-01-5101

- One of 5 sizes/variants in the Inforce "Diamond Cutting" family – see the full range table for the rest
- Packed 50 pcs per carton

Diameter	150 mm
Diameter (inch)	6
Bore diameter	22.2 mm
Bore diameter 1	22.2 mm
Bore diameter 2	22.2 mm
Thickness	2.3 mm
Diamond segment height	10 mm
Number of segments	12 pcs
Pack quantity	1 pcs



DIAMOND DISC

Diamond disc for rounding 130x22.2 mm

05-13-10

- One of 5 sizes/variants in the Inforce "Diamond Disc" family – see the full range table for the rest
- Packed 40 pcs per carton

Outer diameter	130 mm
Bore diameter	22.2 mm
Thickness	2 mm
Bearing	No
Net weight	0.2 kg



DIAMOND DISC

Diamond disc for stone 125 mm

11-01-027

- One of 5 sizes/variants in the Inforce "Diamond Disc" family – see the full range table for the rest
- Packed 100 pcs per carton

Diameter	125 mm
Diameter (inch)	5
Bore diameter	22.2 mm
Bore diameter 1	22.2 mm
Bore diameter 2	22.2 mm
Thickness	2 mm
Diamond segment height	12 mm
For building materials	Yes
Number of segments	9 pcs
Pack quantity	1 pcs




DIAMOND DISC

Diamond disc for stripping chamfer 130x22.2 mm

05-13-09

- One of 5 sizes/variants in the Inforce "Diamond Disc" family – see the full range table for the rest
- Packed 48 pcs per carton

Outer diameter	130 mm
Bore diameter	22.2 mm
Bearing	No
Net weight	0.2 kg

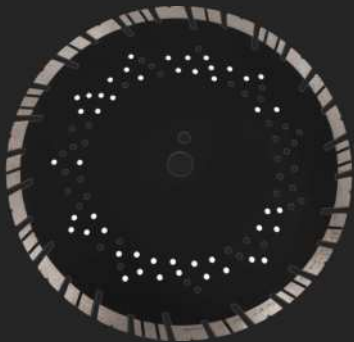

DISC

Disc diamond cutting 350x25.4 x3.2mm for reinforced concrete

11-01-5104

- One of 3 sizes/variants in the Inforce "Disc" family – see the full range table for the rest
- Packed 10 pcs per carton

Diameter	350 mm
Diameter (inch)	14
Bore diameter	25.4 mm
Bore diameter 1	25.4 mm
Bore diameter 2	25.4 mm
Thickness	3.2 mm
Diamond segment height	14 mm
Number of segments	28 pcs
Pack quantity	1 pcs



DISC

Disc diamond cutting 350x25.4 x3.2mm for reinforced concrete

11-01-5105

- One of 3 sizes/variants in the Inforce "Disc" family – see the full range table for the rest
- Packed 10 pcs per carton

Diameter	350 mm
Diameter (inch)	14
Bore diameter	25.4 mm
Bore diameter 1	25.4 mm
Bore diameter 2	20 mm
Thickness	3.2 mm
Diamond segment height	10 mm
Pack quantity	1 pcs
Disc type	Diamond



DISC

Disc diamond cutting 400x25.4x3.6mm for granite

11-01-5106

- One of 3 sizes/variants in the Inforce "Disc" family – see the full range table for the rest
- Packed 5 pcs per carton

Diameter	400 mm
Diameter (inch)	16
Bore diameter	25.4 mm
Bore diameter 1	25.4 mm
Bore diameter 2	25.4 mm
Thickness	3.6 mm
Diamond segment height	8 mm
Pack quantity	1 pcs
Disc type	Diamond
Disc type	Solid (continuous rim)



FIBRE

Fibre disc, 36+, 125 mm x 22 mm 3 pcs/ pack

11-25-136

- One of 3 sizes/variants in the Inforce "Fibre" family – see the full range table for the rest
- Packed 160 pcs per carton

Diameter	125 mm
Bore diameter	22.2 mm
Pack quantity	3 pcs
Grit	36
Disc type	Grinding
Type	Wheel/disc Grinding
Shape	Straight
Mounting type	Clamp
Application	For metal
Mounting	Backing-pad mounted



FIBRE

Fibre disc, 60+, 125 mm x 22 mm 3 pcs/ pack

11-25-161

- One of 3 sizes/variants in the Inforce "Fibre" family – see the full range table for the rest
- Packed 300 pcs per carton

Diameter	125 mm
Bore diameter	22.2 mm
Pack quantity	3 pcs
Grit	60
Disc type	Grinding
Type	Wheel/disc Grinding
Grain type	Aluminium oxide
Shape	Straight
Mounting type	Clamp
Application	For metal



FIBRE

Fibre disc, 60+, 125 mm x 22 mm, 3 pcs/ pack
11-25-160

- One of 3 sizes/variants in the Inforce "Fibre" family – see the full range table for the rest
- Packed 260 pcs per carton

Diameter	125 mm
Bore diameter	22.2 mm
Pack quantity	3 pcs
Grit	60
Disc type	Grinding
Type	Wheel/disc Grinding
Grain type	Ceramic
Shape	Straight
Mounting type	Clamp
Application	For metal



FLAP

Flap disc 125x22.2 P40
11-01-038

- One of 6 sizes/variants in the Inforce "Flap" family – see the full range table for the rest
- Packed 200 pcs per carton

Diameter	125 mm
Bore diameter	22.2 mm
Backing material	Fiberglass
Flap backing material	Cotton fabric base
Abrasive material	Zirconium
Pack quantity	1 pcs
Grit (FEPA P)	40
Disc type	Grinding
Type	KLT 1 (Flat)
Application	For metal




FLAP

Flap disc 125x22.2 P60
11-01-039

- One of 6 sizes/variants in the Inforce "Flap" family – see the full range table for the rest
- Packed 200 pcs per carton

Diameter	125 mm
Bore diameter	22.2 mm
Backing material	Fiberglass
Flap backing material	Cotton fabric base
Abrasive material	Zirconium
Pack quantity	1 pcs
Grit (FEPA P)	60
Disc type	Grinding
Type	KLT 1 (Flat)
Application	For metal



FLAP

Flap Disc, 125 mm, Zirconia
11-01-616

- Flap disc for aggressive stock removal and weld dressing on steel
- Range also includes P60 zirconia and standard P40-P120 grits – see the full range table

Diameter	125 mm
Bore diameter	22.2 mm
Backing material	Fiberglass
Flap backing material	Cotton fabric base
Abrasive material	Oxide aluminium Zirconia
Pack quantity	1 pcs
Grit (FEPA P)	40
Disc type	Grinding
Type	KLT 1 (Flat)
Application	For metal



METAL CUTTING

Metal cutting blades 228x1.8mm, 5 pcs

11-01-731

- One of 2 sizes/variants in the Inforce "Metal Cutting" family – see the full range table for the rest
- Packed 100 pcs per carton

Overall length	228 mm
Blade thickness	0.9 mm
Material worked	For metal
Blade material	Bi-metal
Pack quantity	5
Product type	Blades for reciprocating-saw saw
Tooth pitch	1.8 mm



METAL CUTTING

Metal cutting blades 228x2.5-3.2 mm, 2pcs

11-01-739

- One of 2 sizes/variants in the Inforce "Metal Cutting" family – see the full range table for the rest
- Packed 200 pcs per carton

Overall length	228 mm
Blade thickness	1.6 mm
Material worked	For metal
Blade material	Bi-metal
Pack quantity	2
Product type	Saw blade
Tooth pitch	2.5/3.2




SANDING

Sanding belt 5 pcs. 76x456 mm P80 5pcs

11-01-044

- One of 17 sizes/variants in the Inforce "Sanding" family – see the full range table for the rest
- Packed 72 pcs per carton

Length	456 mm
Width	76 mm
Abrasive material	Aluminium oxide
Grit	80
Grit	80
Quantity	5 pcs
Product type	Belt Sanding
Application	Universal
Base	Fabric

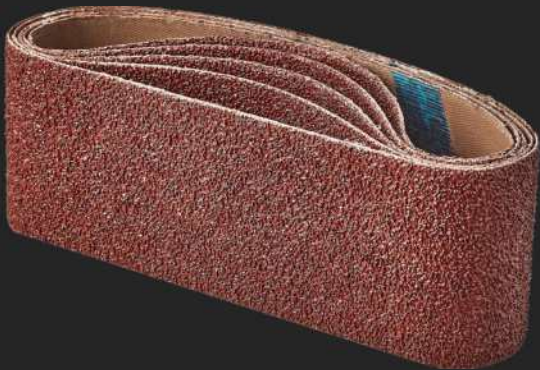

SANDING

Sanding belt 5 pcs. 76x457 mm P40 5pcs

11-01-042

- One of 17 sizes/variants in the Inforce "Sanding" family – see the full range table for the rest
- Packed 72 pcs per carton

Length	457 mm
Width	76 mm
Abrasive material	Aluminium oxide
Grit	40
Grit	40
Quantity	5 pcs
Product type	Belt Sanding
Application	Universal
Base	Fabric



SANDING

Sanding Belt, 610x100 mm, P120

11-01-045

- Widest sanding belt in the Inforce range, for belt sanders
- Also available in 76x457mm and 533x75mm formats, grits P40-P150
- see the full range table

Length	610 mm
Width	100 mm
Abrasive material	Aluminium oxide
Grit	120
Grit	120
Quantity	5 pcs
Product type	Belt Sanding
Application	Universal
Base	Fabric



SEGMENTED DIAMOND

Segmented diamond disc for concrete
350/25.4

05-13-42

- One of 2 sizes/variants in the Inforce "Segmented Diamond" family – see the full range table for the rest
- Packed 10 pcs per carton

Diameter	350 mm
Diameter (inch)	14
Bore diameter	25.4/20
Bore diameter 1	25.4 mm
Bore diameter 2	20 mm
Thickness	3.2 mm
Diamond segment height	12 mm
For building materials	Yes
For abrasive materials	Yes
Number of segments	22 pcs



SEGMENTED DIAMOND

Segmented diamond disc for concrete
400/25.4

05-13-43

- One of 2 sizes/variants in the Inforce "Segmented Diamond" family – see the full range table for the rest
- Packed 5 pcs per carton

Diameter	400 mm
Diameter (inch)	16
Bore diameter	25.4 mm
Bore diameter 1	25.4 mm
Bore diameter 2	25.4 mm
Thickness	3.6 mm
Diamond segment height	10 mm
For building materials	Yes
Number of segments	28 pcs
Pack quantity	1 pcs



SOLID DIAMOND

Solid diamond disc for porcelain tile
200x25.4 mm

11-01-511

- One of 2 sizes/variants in the Inforce "Solid Diamond" family – see the full range table for the rest
- Packed 25 pcs per carton

Diameter	200 mm
Diameter (inch)	8
Bore diameter	25.4 mm
Bore diameter 1	25.4 mm
Bore diameter 2	25.4 mm
Thickness	1.6 mm
Diamond segment height	15 mm
Pack quantity	1 pcs
Disc type	Diamond




SOLID DIAMOND

Solid diamond disc for porcelain tile
250x25.4 mm

11-01-512

- One of 2 sizes/variants in the Inforce "Solid Diamond" family – see the full range table for the rest
- Packed 25 pcs per carton

Diameter	250 mm
Diameter (inch)	9 7/8
Bore diameter	25.4 mm
Bore diameter 1	25.4 mm
Bore diameter 2	25.4 mm
Thickness	1.35 mm
Diamond segment height	8 mm
Pack quantity	1 pcs
Disc type	Diamond

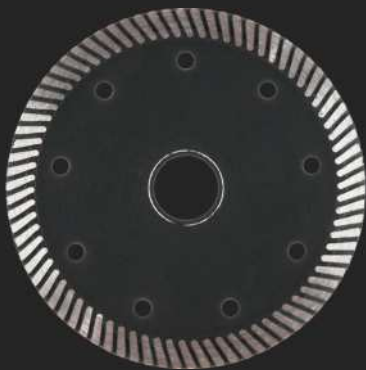


TURBO DIAMOND

Turbo diamond disc for reinforced concrete
125x22.2 mm

11-01-600

- Standalone item in the Inforce consumables/hand tools range
- Packed 100 pcs per carton

Diameter	125 mm
Diameter (inch)	5
Bore diameter	22.2 mm
Bore diameter 1	22.2 mm
Bore diameter 2	22.2 mm
Thickness	2.3 mm
Diamond segment height	10 mm
Pack quantity	1 pcs
Disc type	Diamond



ULTRA-THIN TURBO

Ultra-thin turbo diamond disc
115x22.23x1.2mm

11-01-495

- One of 2 sizes/variants in the Inforce "Ultra-Thin Turbo" family – see the full range table for the rest
- Packed 100 pcs per carton

Diameter	115 mm
Diameter (inch)	4 1/2
Bore diameter	22.2 mm
Bore diameter 1	22.2 mm
Bore diameter 2	22.2 mm
Thickness	1.2 mm
Diamond segment height	10 mm
Pack quantity	1 pcs
Disc type	Diamond
Disc type	Turbo with Solid (continuous rim) edge (X-type)



ULTRA-THIN TURBO

Ultra-thin turbo diamond disc for angle grinder

11-01-496

- One of 2 sizes/variants in the Inforce "Ultra-Thin Turbo" family – see the full range table for the rest
- Packed 100 pcs per carton

Diameter	125 mm
Diameter (inch)	5
Bore diameter	22.2 mm
Bore diameter 1	22.2 mm
Bore diameter 2	22.2 mm
Thickness	1.25 mm
Diamond segment height	10 mm
Pack quantity	1 pcs
Disc type	Diamond
Disc type	Turbo



UNIVERSAL SEGMENTED

Segmented Diamond Wheel, 350 mm

11-20-350

- Universal segmented diamond wheel for concrete and masonry
- Largest-diameter cutting wheel in the Inforce consumables range

Diameter	350 mm
Diameter (inch)	14
Bore diameter	25.4/20
Bore diameter 1	25.4 mm
Bore diameter 2	20 mm
Thickness	2.2 mm
Diamond segment height	10 mm
For building materials	Yes
Number of segments	25 pcs
Pack quantity	1 pcs



WOOD/METAL BLADE

Wood/metal blade set 152x8.5/4/1.4 mm, 3pcs

11-01-738

- Standalone item in the Inforce consumables/hand tools range
- Packed 200 pcs per carton

Overall length	152 mm
Blade thickness	1.25 mm
Material worked	For wood & metal
Blade material	BIM, HCS
Pack quantity	3
Product type	Saw blade
Tooth pitch	8.5 mm



WOOD CUTTING

Wood cutting blade 152x4.0 mm

11-01-740

- Standalone item in the Inforce consumables/hand tools range
- Packed 250 pcs per carton

Overall length	152 mm
Blade thickness	1.25 mm
Material worked	For wood
Blade material	CrV
Pack quantity	1
Product type	Blades for reciprocating-saw saw
Tooth pitch	4 mm



JIGSAW

Jigsaw blades for wood 3 pcs

12-23-06

- One of 6 sizes/variants in the Inforce "Jigsaw" family – see the full range table for the rest
- Packed 500 pcs per carton

Working length	74 mm
Overall length	100 mm
Net weight	0.02 kg
Dimensions (unpacked)	100x74 mm
Material	HSS
Shank type	Shank t
Quantity	3 pcs
Type	For wood
Application	Clean cut
Tooth direction	Straight



JIGSAW

Jigsaw blades for wood 5 pcs

12-23-04

- One of 6 sizes/variants in the Inforce "Jigsaw" family – see the full range table for the rest
- Packed 500 pcs per carton

Working length	74 mm
Overall length	100 mm
Net weight	0.005 kg
Dimensions (unpacked)	100x8x1,3 mm
Material	HSS
Shank type	Shank t
Quantity	5 pcs
Type	For wood
Application	Clean cut
Tooth direction	Reverse



JIGSAW

Jigsaw blades for wood 5 pcs

12-23-05

- One of 6 sizes/variants in the Inforce "Jigsaw" family – see the full range table for the rest
- Packed 500 pcs per carton

Working length	50 mm
Overall length	76 mm
Net weight	0.02 kg
Dimensions (unpacked)	76x15 mm
Material	HSS
Shank type	Shank t
Quantity	5 pcs
Type	For wood
Application	Clean cut
Tooth direction	Straight



SAW

Saw blade 165x20x40 for wood

11-01-601

- One of 9 sizes/variants in the Inforce "Saw" family – see the full range table for the rest
- Packed 50 pcs per carton

Diameter	165 mm
Diameter (inch)	6 1/2
Bore diameter	20 mm
Bore diameter 1	20 mm
Bore diameter 2	20 mm
Bore diameter 3	20 mm
Max speed	8000 rpm
Thickness	1.4 mm
Kerf width	2.3 mm
Number of teeth	40 pcs



SAW

Saw blade 185x30x40 for wood

11-01-602

- One of 9 sizes/variants in the Inforce "Saw" family – see the full range table for the rest
- Packed 50 pcs per carton

Diameter	185 mm
Diameter (inch)	7 1/4
Bore diameter	30 mm
Bore diameter 1	30 mm
Bore diameter 2	30 mm
Bore diameter 3	30 mm
Max speed	7000 rpm
Thickness	1.4 mm
Kerf width	2.3 mm
Number of teeth	40 pcs



SAW

Saw Blade, 305x30x96, Aluminium

11-01-614

- Fine-tooth saw blade for clean cuts in aluminium profile
- Range also covers wood and metal-cutting blades from 165 to 305 mm – see the full range table

Diameter	305 mm
Diameter (inch)	12
Bore diameter	30 mm
Bore diameter 1	30 mm
Bore diameter 2	30 mm
Bore diameter 3	30 mm
Max speed	4600 rpm
Thickness	2.2 mm
Kerf width	2.8 mm
Number of teeth	96 pcs



UNIVERSAL GUIDE

Universal guide rail 1250 mm

06-18-22

- One of 2 sizes/variants in the Inforce "Universal Guide" family – see the full range table for the rest
- Packed 6 pcs per carton

Max length	1250 mm
Dimensions (unpacked)	1260x205x105 mm
Net weight	1.4 kg
Max guide bar width	70 mm
Product type	Guide bar guide



UNIVERSAL JIGSAW

Universal jigsaw blade set 10 pcs

12-23-02

- Standalone item in the Inforce consumables/hand tools range
- Packed 100 pcs per carton

Working length	72.51 mm
Overall length	100.76 mm
Net weight	0.1 kg
Shank type	Shank t
Material	HSS
Quantity	10 pcs
Type	Universal
Application	Curved cut
Packaging kind	Case
Pitch	1,2/2/4/2,5



UNIVERSAL GUIDE

Universal guide rail 900 mm

06-18-21

- One of 2 sizes/variants in the Inforce "Universal Guide" family – see the full range table for the rest
- Packed 6 pcs per carton

Max length	900 mm
Dimensions (unpacked)	1140x80x35 mm
Net weight	1.1 kg
Max guide bar width	70 mm
Product type	Guide bar guide

BIT

11-01-291	Bit PH2x50mm 2 pcs
11-01-292	Bit PH2x50mm 5 pcs
11-01-293	Bit PH2x75mm 5 pcs
11-01-294	Bit PH2x90mm 5 pcs
11-01-295	Bit Pz2x50mm 5 pcs
11-01-286	Bit set 14 pcs
11-01-285	Bit set with holder 11 pcs
11-01-297	Bit with magnetic ring / holder PH 2x50 mm 2 pcs

BITS

11-01-376	Bits steel S2, with serrated, PH 2x90mm, 10 pcs
11-01-371	Bits steel S2, with serrated, PH2x150mm, 10 pcs
11-01-381	Bits, PH1, 50 mm, 10 pcs
11-01-370	Bits, PH2, 100 mm, 10 pcs

DIAMOND CUTTING

11-01-703	Diamond cutting disc for ceramic tile 125x22.2 mm
11-01-702	Diamond cutting disc for metal 125x22.2 mm

DIAMOND DISC

11-01-510	Diamond disc for angle grinder 150x22.2 mm
11-01-028	Diamond disc for stone 230 mm

DRILL

11-01-0595	Drill bit SDS+ 10x160 for reinforced concrete 4X 11-01-595
11-01-0596	Drill bit SDS+ 10x210 for reinforced concrete 4X 11-01-596
11-01-0575	Drill bit SDS+ 10x215 for reinforced concrete 3X 11-01-575
11-01-0576	Drill bit SDS+ 10x265 for reinforced concrete 3X 11-01-576
11-01-0547	Drill bit SDS+ 10x310 for concrete 2X 11-01-547
11-01-0577	Drill bit SDS+ 10x310 for reinforced concrete 3X 11-01-577
11-01-0581	Drill bit SDS+ 12x210 for reinforced concrete 3X 11-01-581
11-01-0597	Drill bit SDS+ 12x210 for reinforced concrete 4X 11-01-597
11-01-0587	Drill bit SDS+ 16x210 for reinforced concrete 3X 11-01-587
11-01-0565	Drill bit SDS+ 6x110 for reinforced concrete 3X 11-01-565
11-01-0590	Drill bit SDS+ 6x110 for reinforced concrete 4X 11-01-590
11-01-0567	Drill bit SDS+ 6x210 for reinforced concrete 3X 11-01-567
11-01-0568	Drill bit SDS+ 6x260 for reinforced concrete 3X 11-01-568
11-01-0571	Drill bit SDS+ 8x160 for reinforced concrete 3X 11-01-571
11-01-0594	Drill bit SDS+ 8x260 for reinforced concrete 4X 11-01-594
11-01-0566	Drill bitSDS+ 6x160 for reinforced concrete 3X 11-01-566

FLAP

11-01-041	Flap disc 125x22.2 P120
11-01-617	Flap disc 125x22.2 P60 zirconia
11-01-040	Flap disc 125x22.2 P80

HEX SOCKET

11-01-477	Hex socket 1/2 DR 14mm
11-01-478	Hex socket 1/2 DR 15mm
11-01-479	Hex socket 1/2 DR 16mm
11-01-480	Hex socket 1/2 DR 17mm
11-01-481	Hex socket 1/2 DR 18mm
11-01-482	Hex socket 1/2 DR 19mm
11-01-483	Hex socket 1/2 DR 21mm
11-01-484	Hex socket 1/2 DR 22mm
11-01-485	Hex socket 1/2 DR 24mm
11-01-487	Hex socket 1/2 DR 30mm
11-01-488	Hex socket 1/2 DR 32mm
11-01-472	Hex socket 1/2 DR 8mm
11-01-461	Hex socket 1/4 DR 10mm
11-01-462	Hex socket 1/4 DR 12mm
11-01-463	Hex socket 1/4 DR 13mm
11-01-459	Hex socket 1/4 DR 7mm
11-01-460	Hex socket 1/4 DR 8mm
11-01-466	Hex socket 3/8 DR 10mm
11-01-468	Hex socket 3/8 DR 13mm
11-01-470	Hex socket 3/8 DR 17mm
11-01-471	Hex socket 3/8 DR 19mm

IMPACT SOCKET

11-01-625	Impact socket 1/2"DR, 17mm
11-01-626	Impact socket 1/2"DR, 19mm
11-01-629	Impact socket 1/2"DR, 24mm
11-01-630	Impact socket 1/2"DR, 30mm
11-01-632	Impact socket 1/2"DR, 36mm

JIGSAW

12-23-09	Jigsaw blades for laminate 5 pcs.
12-23-08	Jigsaw blades for metal 5 pcs.
12-23-07	Jigsaw blades for wood 10 pcs.

METAL DRILL

11-01-440	Metal drill bit HSS-Co 10x133mm
11-01-453	Metal drill bit HSS-Co 10x133mm 5 pcs in pack
11-01-441	Metal drill bit HSS-Co 12x151mm
11-01-454	Metal drill bit HSS-Co 12x151mm 5 pcs in pack
11-01-443	Metal drill bit HSS-Co 3.5x70mm 10 pcs in pack
11-01-430	Metal drill bit HSS-Co 3.5x70mm
11-01-442	Metal drill bit HSS-Co 3x61mm 10 pcs in pack
11-01-429	Metal drill bit HSS-Co 3x61mm
11-01-720	Metal drill bit HSS-Co 4.2x75mm
11-01-445	Metal drill bit HSS-Co 4.5x80mm 10 pcs in pack
11-01-432	Metal drill bit HSS-Co 4.5x80mm
11-01-444	Metal drill bit HSS-Co 4x75mm 10 pcs in pack
11-01-431	Metal drill bit HSS-Co 4x75mm
11-01-446	Metal drill bit HSS-Co 5x86mm 10 pcs in pack
11-01-433	Metal drill bit HSS-Co 5x86mm
11-01-448	Metal drill bit HSS-Co 6.5x101mm 10 pcs in pack
11-01-435	Metal drill bit HSS-Co 6.5x101mm
11-01-447	Metal drill bit HSS-Co 6x93mm 10 pcs in pack
11-01-434	Metal drill bit HSS-Co 6x93mm
11-01-449	Metal drill bit HSS-Co 7x109mm 10 pcs in pack
11-01-436	Metal drill bit HSS-Co 7x109mm
11-01-451	Metal drill bit HSS-Co 8.5x117mm 10 pcs in pack
11-01-438	Metal drill bit HSS-Co 8.5x117mm
11-01-450	Metal drill bit HSS-Co 8x117mm 10 pcs in pack
11-01-437	Metal drill bit HSS-Co 8x117mm
11-01-439	Metal drill bit HSS-Co 9x125mm
11-01-452	Metal drill bit HSS-Co 9x125mm 5 pcs in pack
11-01-698	Metal drill bit HSS-G 10x133x87 mm
11-01-696	Metal drill bit HSS-G 11x142x94 mm
11-01-669	Metal drill bit HSS-G 2.5x57x30 mm 2 pcs in pack
11-01-670	Metal drill bit HSS-G 2x49x24 mm 2 pcs in pack
11-01-667	Metal drill bit HSS-G 3.2x65x36 mm 2 pcs in pack
11-01-666	Metal drill bit HSS-G 3.5x70x39 mm 2 pcs in pack
11-01-673	Metal drill bit HSS-G 4.2x75x43 mm 10 pcs in pack
11-01-685	Metal drill bit HSS-G 4.5x80x47 mm
11-01-665	Metal drill bit HSS-G 4x75x43 mm 2 pcs in pack
11-01-684	Metal drill bit HSS-G 5x86x52 mm
11-01-682	Metal drill bit HSS-G 6x93x57 mm
11-01-680	Metal drill bit HSS-G 7x109x69 mm
11-01-679	Metal drill bit HSS-G 8x117x75 mm
11-01-677	Metal drill bit HSS-G 9x125x81 mm

11-01-724	Metal drill bit double-sided HSS- G 4.2x55mm 10 pcs in pack
11-01-326	Metal drill bit set 1-10*0.5mm HSS-Co
11-01-328	Metal drill bit set 1-6*0.1mm HSS- Co
11-01-704	Metal drill bit set 19 pcs 1-10 HSS- G
11-01-705	Metal drill bit set 25 pcs 1-13 HSS- G
11-01-327	Metal drill bit set 25 pcs 1- 13*0.5mm HSS-Co
11-01-729	Metal drill bits, ground, double- ended, HSS-G, 5.2x18/62 10 pcs.

NON-IMPACT SOCKET

11-01-256	Non-impact socket set 1/4" 5-14 mm
-----------	---------------------------------------

SDS-MAX DRILL

11-01-0518	SDS-max drill bit 16x540 for reinforced concrete 11-01-518
11-01-0521	SDS-max drill bit 20x320 for reinforced concrete 11-01-521
11-01-0522	SDS-max drill bit 20x540 for reinforced concrete 11-01-522
11-01-0523	SDS-max drill bit 22x540 for reinforced concrete 11-01-523
11-01-0525	SDS-max drill bit 25x540 for reinforced concrete 11-01-525
11-01-0526	SDS-max drill bit 25x920 for reinforced concrete 11-01-526
11-01-0527	SDS-max drill bit 32x920 for reinforced concrete 11-01-527
11-01-0528	SDS-max drill bit 40x540 for reinforced concrete 11-01-528
11-01-0529	SDS-max drill bit 40x920 for reinforced concrete 11-01-529

SANDING

11-01-043	Sanding belt 5 pcs. 76x457 mm P60 5pcs.
11-01-506	Sanding belt 533x75mm P100 3pcs
11-01-507	Sanding belt 533x75mm P120 3pcs
11-01-503	Sanding belt 533x75mm P40 3pcs
11-01-504	Sanding belt 533x75mm P60 3pcs
11-01-505	Sanding belt 533x75mm P80 3pcs
11-01-508	Sanding belt 610x100mm P40 3pcs
11-01-509	Sanding belt 610x100mm P80 3pcs
11-01-500	Sanding belt 75x457mm P100 3pcs
11-01-501	Sanding belt 75x457mm P120 3pcs
11-01-502	Sanding belt 75x457mm P150 3pcs
11-01-497	Sanding belt 75x457mm P40 3pcs
11-01-498	Sanding belt 75x457mm P60 3pcs
11-01-499	Sanding belt 75x457mm P80 3pcs

SAW

11-01-604	Saw blade 190x30x24 for wood
11-01-605	Saw blade 190x30x40 for wood
11-01-606	Saw blade 190x30x48 for wood
11-01-608	Saw blade 254x30x48 for wood
11-01-615	Saw blade 254x30x96 for aluminium
11-01-613	Saw blade 305x25.4x60 for metal


SCREWDRIVER

11-01-387	Screwdriver bit PH3 L=50mm 2pcs in pack
11-01-389	Screwdriver bit PZ1 L=50mm 2pcs in pack
11-01-393	Screwdriver bit PZ2 L=50mm 10 pcs in pack
11-01-392	Screwdriver bit PZ2 L=50mm 2pcs in pack
11-01-394	Screwdriver bit PZ3 L=50mm 2pcs in pack

STEP DRILL

11-01-493	Step drill bit 6-38mm M42
-----------	---------------------------

INFORCE

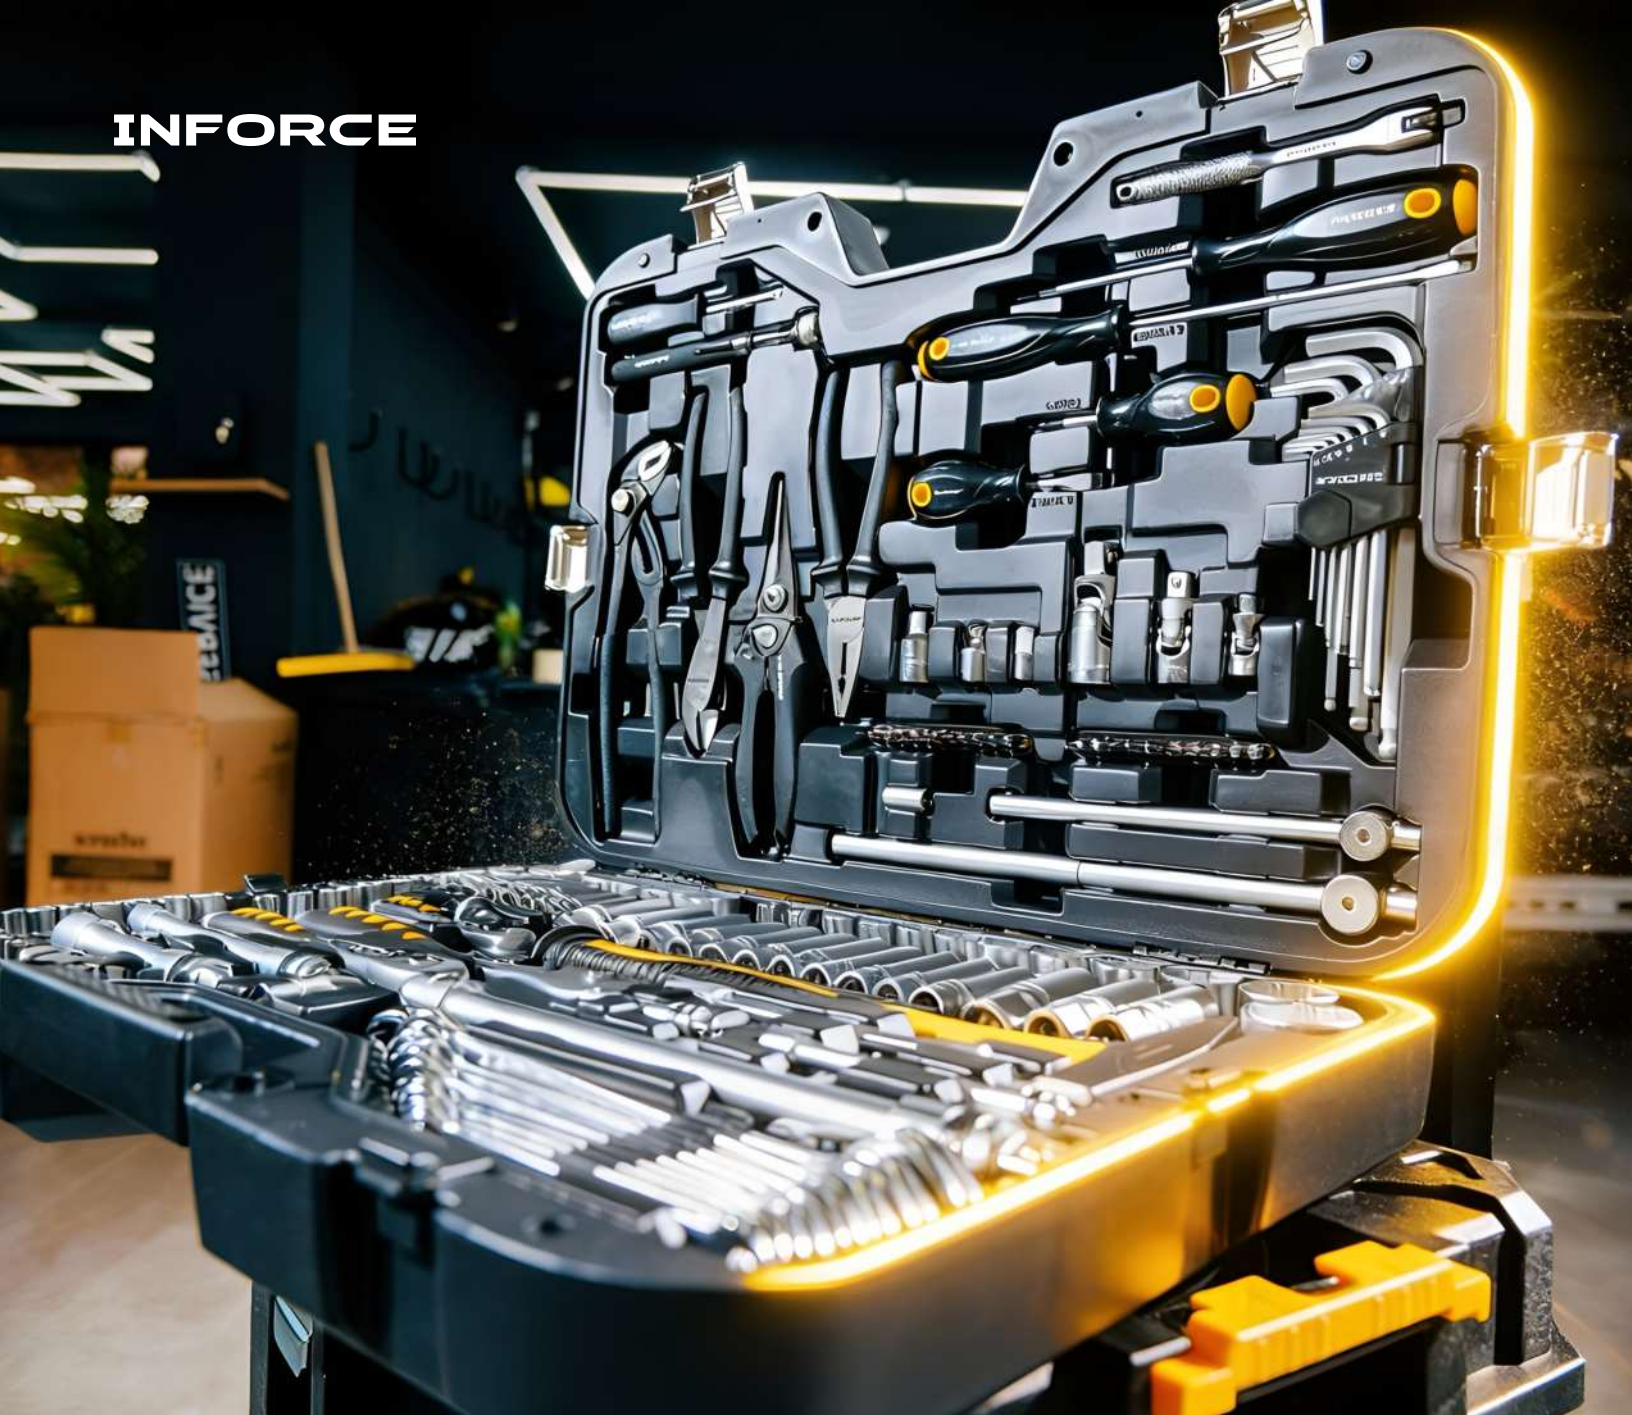

SECTION / 03

HAND TOOLS

Tool sets, wrenches, pliers, clamps, hammers and general hand tools



HAND TOOLS SETS

Cast hand rivet gun in case with rivet set
2.4-4.8 mm

06-14-101

- One of 2 sizes/variants in the Inforce "Cast Hand" family – see the full range table for the rest
- Packed 10 pcs per carton

Min rivet diameter	2.4 mm
Max rivet diameter	4.8 mm
Net weight	1.04 kg
Max clamping thickness	45 mm
Grade	Professional
Rivet material	Aluminium/Steel
Included accessories	Rivets, Rivet gun
Type	Lever-type
Rivet type	Blind (pull)



HAND TOOLS SETS

Corner joint clamp set

06-03-47

- One of 4 sizes/variants in the Inforce "Corner" family – see the full range table for the rest
- Packed 20 pcs per carton

Clamping width	22 mm
Max clamping force	250 N
Type	Clamp
Clamp style	Corner (angle)
Clamping mechanism	Lever-action
Application	Woodworking
Frame material	Plastic
Dimensions (unpacked)	95x75x30 mm
Net weight	0.38 kg
Grade	Professional



HAND TOOLS SETS

Soft putty knife set

06-04-01

- Standalone item in the Inforce consumables/hand tools range
- Packed 100 pcs per carton

Dimensions (unpacked)	120x80x20 mm
Net weight	0.073 kg
Blade width	50 mm
Blade thickness	1.2 mm
Blade height	60 mm
Blade material	Thermoplastic elastomer (TPE)
Handle material	TPR
Pack quantity	5
Teeth	Shaped



HAND TOOLS SETS

Set of 4-x chisels 6, 12, 18, 25 mm

06-15-03

- Standalone item in the Inforce consumables/hand tools range
- Packed 16 pcs per carton

Length	265 mm
Blade length	102 mm
Net weight	0.8 kg
Cutting part width	6/12/18/25
Blade material	Tool steel
Handle material	Three-component rubber-coated
Included in set	4 pcs
Packaging type	Blister pack



HAND TOOLS SETS

Chisel Set, 5 pcs, 6/12/18/25/32 mm

06-15-04

- Woodworking chisel set covering the common 6-32 mm range
- 4-piece set and individual chisels also available – see the full range table

Length	265 mm
Blade length	102 mm
Net weight	1.38 kg
Cutting part width	6/12/18/25/32
Blade material	Steel
Handle material	Two-component
Included in set	5 pcs
Packaging type	Case



HAND TOOLS SETS

Screwdriver Set, ProExpert

06-09-71

- ProExpert screwdriver set – the range's general-purpose entry set
- Individual Phillips, slotted, TORX, and insulated screwdrivers sold separately – see the full range table

Overall length	210 mm
Shaft length	150 mm
Net weight	0.935 kg
Handle material	Polyurethane
Shaft material	CrMoV
Grade	Professional
Pieces in set	6 pcs
Handle shape	Straight
Slot type	SL, PH



HAND TOOLS SETS

Impact screwdriver set 6 pcs

06-09-91

- One of 7 sizes/variants in the Inforce "Impact Screwdriver" family – see the full range table for the rest

Number of pieces	6 pcs
Handle material	ABS plastic + TPR
Handle colour	Black/yellow
Magnetic tip	Yes
Impact	Yes
Shaft material	CrMoV
Handle shape	Straight
Slot type	SL, PH



HAND TOOLS SETS

Insulated screwdriver set 7pcs

06-09-84

- One of 10 sizes/variants in the Inforce "Insulated Screwdriver" family – see the full range table for the rest

Number of pieces	7 pcs
Handle material	Two-component
Handle colour	Black/yellow
Insulated (dielectric)	Yes
Magnetic tip	No
Overall length	415 mm
Shaft material	Steel
Shaft length	150 mm
Handle shape	Straight
Case included	Yes



HAND TOOLS SETS

Screwdriver set 10 pcs

06-09-93

– One of 8 sizes/variants in the Inforce "Screwdriver" family – see the full range table for the rest

Number of pieces	10 pcs
Handle material	ABS plastic + TPR
Handle colour	Black/yellow
Magnetic tip	Yes
Shaft material	CrMoV
Handle shape	Straight
Case included	Yes
Net weight	0.8 kg
Slot type	SL, PH



HAND TOOLS SETS

Universal tool set 1/4" 38 pcs

06-25-09

– One of 3 sizes/variants in the Inforce "Universal Tool" family – see the full range table for the rest

Number of pieces	38 pcs
Packaging	Case
Screwdriver	Yes
Bits	Yes
Sockets	Yes
Ratchet	Yes
Grade	Professional
Net weight	0.848 kg



HAND TOOLS SETS

Universal tool set 66 pcs

06-25-07

– One of 3 sizes/variants in the Inforce "Universal Tool" family – see the full range table for the rest

Number of pieces	66 pcs
Packaging	Case
Hammer	Yes
Screwdriver	Yes
Bits	Yes
Sockets	Yes
Ratchet	Yes
Grade	Professional
Net weight	5 kg



HAND TOOLS SETS

Universal tool set 131 pcs

06-25-08

– One of 3 sizes/variants in the Inforce "Universal Tool" family – see the full range table for the rest

Number of pieces	131 pcs
Packaging	Case
Hammer	Yes
Adjustable wrench	Yes
Pliers	Yes



IMPACT SCREWDRIVER
Impact screwdriver PH3x125mm
06-09-87

– One of 7 sizes/variants in the Inforce "Impact Screwdriver" family – see the full range table for the rest

Slot size	PH3
Shaft length	125 mm
Shaft material	CrMoV
Handle material	Polyurethane
Handle colour	Black/yellow
Handle shape	Straight
Impact	Yes
Overall length	273.3 mm
Net weight	0.31 kg
Grade	Professional



IMPACT SCREWDRIVER
Impact screwdriver SL5.5x100mm
06-09-88

– One of 7 sizes/variants in the Inforce "Impact Screwdriver" family – see the full range table for the rest

Slot size	SL 5.5
Shaft length	100 mm
Overall length	231 mm
Handle material	Polyurethane
Handle colour	Black/yellow
Handle shape	Straight
Shaft material	CrMoV
Impact	Yes
Net weight	0.123 kg



INSULATED SCREWDRIVER
Insulated screwdriver PH0x60mm
06-09-73

– One of 10 sizes/variants in the Inforce "Insulated Screwdriver" family – see the full range table for the rest

Blade size	PH0
Shank length	60 mm
Shank material	Tool steel S2
Handle material	Polyurethane
Handle colour	Black/yellow
Handle shape	Straight
Overall length	180 mm
Dielectric coating (1000V)	Yes
Standard	DIN IEC 60900
Net weight	0.045 kg



INSULATED SCREWDRIVER
Insulated screwdriver PH1x80mm
06-09-74

– One of 10 sizes/variants in the Inforce "Insulated Screwdriver" family – see the full range table for the rest

Slot size	PH1
Shaft length	80 mm
Shaft diameter	4 mm
Shaft material	Tool steel S2
Handle material	Polyurethane
Handle colour	Black/yellow
Handle shape	Straight
Impact	No
Overall length	215 mm
Insulated (dielectric)	Yes



PHILLIPS

Phillips screwdriver ProExpert PH0x60

06-09-54

– One of 3 sizes/variants in the Inforce "Phillips" family – see the full range table for the rest

Blade size	PH0
Shank length	60 mm
Shank diameter	3 mm
Shank material	Tool steel S2
Handle material	Polyurethane
Handle colour	Black/yellow
Handle shape	Straight
Overall length	165 mm
Magnetic tip	Yes
Net weight	0.04 kg



PHILLIPS

Phillips screwdriver ProExpert PH1x80

06-09-55

– One of 3 sizes/variants in the Inforce "Phillips" family – see the full range table for the rest

Slot size	PH1
Shaft length	80 mm
Shaft diameter	5 mm
Shaft material	Tool steel S2
Handle material	Polyurethane
Handle colour	Black/yellow
Handle shape	Straight
Impact	No
Overall length	200 mm
Magnetic tip	Yes



PHILLIPS

Phillips screwdriver ProExpert PH2x100

06-09-56

– One of 3 sizes/variants in the Inforce "Phillips" family – see the full range table for the rest

Blade size	PH2
Shank length	100 mm
Shank diameter	6 mm
Shank material	Tool steel S2
Handle material	Polyurethane
Handle colour	Black/yellow
Handle shape	Straight
Overall length	230 mm
Magnetic tip	Yes
Net weight	0.12 kg



SLOTTED

Slotted screwdriver ProExpert SL4x80

06-09-59

– One of 5 sizes/variants in the Inforce "Slotted" family – see the full range table for the rest

Blade size	SL4
Shank length	80 mm
Shank diameter	5 mm
Shank material	Tool steel S2
Handle material	Polyurethane
Handle colour	Black/yellow
Handle shape	Straight
Overall length	200 mm
Magnetic tip	Yes
Standard	DIN 5265, ISO 2380



SLOTTED

Slotted screwdriver ProExpert SL5x125

06-09-60

– One of 5 sizes/variants in the Inforce "Slotted" family – see the full range table for the rest

Blade size	SL5.5
Shank length	125 mm
Shank diameter	6 mm
Shank material	Tool steel S2
Handle material	Polyurethane
Handle colour	Black/yellow
Handle shape	Straight
Overall length	245 mm
Magnetic tip	Yes
Standard	DIN 5265, ISO 2380



LEVER

Lever pipe wrench No. 2, type S

06-05-115

– One of 8 sizes/variants in the Inforce "Lever" family – see the full range table for the rest
– Packed 12 pcs per carton

Length	400 mm
Net weight	1.558 kg
Grip width	15 mm
Working part material	CrV
Handle material	CrV
Grade	Professional
Type	Swedish-type (Lever-type)
Kind	Metric (mm)/Imperial (inch)
Jaw angle	45 °
Wrench number	Nº2



LEVER

Lever pipe wrench No. 1, type S

06-05-114

– One of 8 sizes/variants in the Inforce "Lever" family – see the full range table for the rest
– Packed 36 pcs per carton

Length	300 mm
Net weight	0.878 kg
Grip width	13 mm
Working part material	CrV
Handle material	CrV
Grade	Professional
Type	Swedish-type (Lever-type)
Kind	Metric (mm)/Imperial (inch)
Jaw angle	45 °
Wrench number	Nº1



CABLE

Cable lug crimping pliers 0.5 - 6 mm²

06-19-20

– One of 2 sizes/variants in the Inforce "Cable" family – see the full range table for the rest
– Packed 40 pcs per carton

Dimensions (unpacked)	221 mm
Net weight	0.53 kg
Grade	Professional
Type	For mains-powered work (Crimping tool)
RJ connector type	No (no RJ connector)
Insulated terminal cross-section	0.5-6 mm²
Min insulated terminal cross-section	0.5 mm²
Max insulated terminal cross-section	6 mm²
Copper and aluminium terminals	Yes
Crimp profile	Oval double-loop



CABLE

Cable stripping tool 0.5-16 mm2

06-19-15

- One of 2 sizes/variants in the Inforce "Cable" family – see the full range table for the rest
- Packed 40 pcs per carton

Max cable diameter	4.05 mm
Min cable diameter	0.8 mm
Cutting diameter adjustment	Yes
Length	190 mm
Net weight	0.23 kg
Dimensions (unpacked)	212x97x36 mm
Grade	Professional
Type	Automatic
Application	For round-cable stripping
Wire cross-section	0.5-16



CRIMPING

Crimping Pliers Set, +8 Dies, in Pouch

06-19-17

- Interchangeable-die crimping set covering 0.5-35 mm² cable lugs and ferrules
- Dedicated hex, square and end-crimp pliers also available – see the full range table

Dimensions (unpacked)	224x75x20
Net weight	0.54 kg
Grade	Professional
Type	For automotive terminals/Insulated/Bare (uninsulated)/ferrule terminal
RJ connector type	No (no RJ connector)
Insulated terminal cross-section	0.25-35 mm²
Min insulated terminal cross-section	0.25 mm²
Max insulated terminal cross-section	35 mm²
Uninsulated (Al) terminal wire range	0.25-10 mm²
Min uninsulated (Al) terminal wire size	0.25 mm²



CRIMPING

Crimping pliers with die set

06-19-19

- One of 2 sizes/variants in the Inforce "Crimping" family – see the full range table for the rest
- Packed 40 pcs per carton

Dimensions (unpacked)	192x75x19
Net weight	0.35 kg
Grade	Professional
Type	For automotive terminals & Bare (uninsulated) terminal
RJ connector type	No (no RJ connector)
Bare terminal cross-section (Cu)	0.25-2.5 mm²
Min bare terminal cross-section (Cu)	1 mm²
Max bare terminal cross-section (Cu)	2.5 mm²
Terminal wire range	0.25-2.5 mm²
Min terminal wire size	0.25 mm²



END-CRIMPING

End-crimping pliers 0.08 – 16 mm2

06-19-16

- Standalone item in the Inforce consumables/hand tools range
- Packed 40 pcs per carton

Dimensions (unpacked)	190x74x26
Net weight	0.5 kg
Grade	Professional
Type	For ferrule terminal
RJ connector type	No (no RJ connector)
Insulated terminal cross-section	0.08-16 mm²
Min insulated terminal cross-section	0.08 mm²
Max insulated terminal cross-section	16 mm²
Bare terminal cross-section (Cu)	0.08-16 mm²
Min bare terminal cross-section (Cu)	0.08 mm²



HEX-CRIMP PLIERS

Hex-crimp pliers 0.08 - 16 mm2 teflon

06-19-18

- One of 2 sizes/variants in the Inforce "Hex-Crimp Pliers" family – see the full range table for the rest
- Packed 40 pcs per carton

Dimensions (unpackaged)	228x81x35
Net weight	0.48 kg
Grade	Professional
Type	For ferrule terminal
RJ connector type	No (no RJ connector)
Insulated terminal cross-section	0.08-16 mm²
Min insulated terminal cross-section	0.08 mm²
Max insulated terminal cross-section	16 mm²
Uninsulated (Al) terminal wire range	0.08-16 mm²
Min uninsulated (Al) terminal wire size	0.08 mm²



HEX-CRIMP PLIERS

Hex-crimp pliers 0.08-6 mm2

06-19-11

- One of 2 sizes/variants in the Inforce "Hex-Crimp Pliers" family – see the full range table for the rest
- Packed 40 pcs per carton

Dimensions (unpackaged)	182x87x32 mm
Net weight	0.4 kg
Grade	Semi-professional
Type	For ferrule terminal
RJ connector type	No (no RJ connector)
Insulated terminal cross-section	0.08-6 mm²
Min insulated terminal cross-section	0.08 mm²
Max insulated terminal cross-section	6 mm²
Uninsulated (Al) terminal wire range	0.08-6 mm²
Min uninsulated (Al) terminal wire size	0.08 mm²



SQUARE-CRIMP PLIERS

Square-crimp pliers 0.08-10 mm2

06-19-10

- One of 3 sizes/variants in the Inforce "Square-Crimp Pliers" family – see the full range table for the rest
- Packed 40 pcs per carton

Dimensions (unpackaged)	182x87x32 mm
Net weight	0.4 kg
Grade	Professional
Type	For ferrule terminal
RJ connector type	No (no RJ connector)
Insulated terminal cross-section	0.08-10 mm²
Min insulated terminal cross-section	0.08 mm²
Max insulated terminal cross-section	10 mm²
Ferrule terminal cross-section	0.08-10 mm²
Min ferrule terminal cross-section	0.08 mm²



SQUARE-CRIMP PLIERS

Square-crimp pliers with adjustment screw 0.2 – 16 mm²

06-19-13

- One of 3 sizes/variants in the Inforce "Square-Crimp Pliers" family – see the full range table for the rest
- Packed 40 pcs per carton

Dimensions (unpackaged)	182x87x32 mm
Net weight	0.4 kg
Grade	Professional
Type	For ferrule terminal
RJ connector type	No (no RJ connector)
Insulated terminal cross-section	0.08-16 mm²
Ferrule terminal cross-section	0.08-16 mm²
Min ferrule terminal cross-section	0.08 mm²
Max ferrule terminal cross-section	16 mm²



SQUARE-CRIMP PLIERS

Square-crimp pliers with adjustment screw
0.25 – 10 mm²

06-19-12

- One of 3 sizes/variants in the Inforce "Square-Crimp Pliers" family – see the full range table for the rest
- Packed 40 pcs per carton

Dimensions (unpacked)	182x87x32 mm
Net weight	0.4 kg
Grade	Professional
Type	For ferrule terminal
RJ connector type	No (no RJ connector)
Ferrule terminal cross-section	0.25-10 mm²
Min ferrule terminal cross-section	0.25 mm²
Max ferrule terminal cross-section	10 mm²
Ferrule (NSHV12) wire range	0.25-10 mm²



WIRE

Wire stripping tool 0.5 – 10 mm²

06-19-14

- Standalone item in the Inforce consumables/hand tools range
- Packed 40 pcs per carton

Max cable diameter	3.05 mm
Min cable diameter	0.8 mm
Cutting diameter adjustment	Yes
Length	100 mm
Net weight	0.17 kg
Dimensions (unpacked)	212x97x36 mm
Grade	Professional
Type	Automatic
Application	For stripping insulation
Wire cross-section	0.5-10



BAND

Band clamp 4m

06-03-40

- Standalone item in the Inforce consumables/hand tools range
- Packed 24 pcs per carton

Max force	300 N
Belt length	4000 mm
Dimensions (unpacked)	330x180x45 mm
Net weight	0.37 kg
Belt width	25 mm
Belt material	Nylon
Jaw material	Plastic
Frame material	Plastic
Grade	Semi-professional
Number of corners	4



CORNER

Corner clamp 75mm

06-03-41

- One of 4 sizes/variants in the Inforce "Corner" family – see the full range table for the rest
- Packed 48 pcs per carton

Max force	500 N
Clamping depth	75 mm
Net weight	0.3 kg
Clamping width	80 mm
Material	Aluminium
Grade	Semi-professional
Clamp type	Angled
Clamp type	Screw-type
Application	For wood



CORNER

Corner clamp, single screw 102 mm

06-03-45

- One of 4 sizes/variants in the Inforce "Corner" family – see the full range table for the rest
- Packed 24 pcs per carton

Max force	1500 N
Clamping depth	36 mm
Net weight	1.01 kg
Clamping width	102 mm
Material	Plastic
Grade	Professional
Clamp type	Angled
Clamp type	Screw-type
Application	For wood
Angle	90 °



F-CLAMP

F-clamp 50x200mm

06-03-26

- One of 3 sizes/variants in the Inforce "F-Clamp" family – see the full range table for the rest
- Packed 30 pcs per carton

Max force	1600 N
Clamping depth	50 mm
Dimensions (unpackaged)	265x87x25 mm
Net weight	0.35 kg
Clamping width	200 mm
Frame material	Steel
Grade	Professional
Type	Clamp
Clamp type	F--shaped
Clamp type	Screw-type



F-CLAMP

F-clamp 50x250mm

06-03-27

- One of 3 sizes/variants in the Inforce "F-Clamp" family – see the full range table for the rest
- Packed 30 pcs per carton

Max force	1600 N
Clamping depth	50 mm
Dimensions (unpackaged)	315x90x25 mm
Net weight	0.347 kg
Clamping width	250 mm
Frame material	Steel
Grade	Professional
Type	Clamp
Clamp type	F--shaped
Clamp type	Screw-type



F-CLAMP

F-clamp 50x300mm

06-03-28

- One of 3 sizes/variants in the Inforce "F-Clamp" family – see the full range table for the rest
- Packed 30 pcs per carton

Max force	1600 N
Clamping depth	50 mm
Dimensions (unpackaged)	370x85x25
Net weight	0.38 kg
Clamping width	300 mm
Frame material	Steel
Grade	Professional
Type	Clamp
Clamp type	F--shaped
Clamp type	Screw-type



G-CLAMP

G-clamp 210 mm

06-03-48

- Standalone item in the Inforce consumables/hand tools range
- Packed 6 pcs per carton

Clamping width	210 mm
Max clamping force	7500 N
Clamping depth	70 mm
Type	Clamp
Clamp style	G-clamp
Clamping mechanism	Screw
Application	Metalworking
Frame material	Cast iron
Dimensions (unpacked)	330x180x32 mm
Net weight	2 kg



HEAVY-DUTY F-CLAMP

Heavy-duty F-clamp 120x1000mm

06-03-31

- One of 3 sizes/variants in the Inforce "Heavy-Duty F-Clamp" family – see the full range table for the rest
- Packed 4 pcs per carton

Max force	6900 N
Clamping depth	120 mm
Net weight	4 kg
Clamping width	1000 mm
Frame material	Steel
Grade	Professional
Type	Clamp
Clamp type	F--shaped
Clamp type	Screw-type
Application	For wood



HEAVY-DUTY F-CLAMP

Heavy-duty F-clamp 120x600mm

06-03-30

- One of 3 sizes/variants in the Inforce "Heavy-Duty F-Clamp" family – see the full range table for the rest
- Packed 4 pcs per carton

Max force	6900 N
Clamping depth	120 mm
Net weight	3.1 kg
Clamping width	600 mm
Frame material	Steel
Grade	Professional
Type	Clamp
Clamp type	F--shaped
Clamp type	Screw-type
Application	For wood



HEAVY-DUTY F-CLAMP

Heavy-duty F-clamp 80x300mm

06-03-29

- One of 3 sizes/variants in the Inforce "Heavy-Duty F-Clamp" family – see the full range table for the rest
- Packed 10 pcs per carton

Max force	4900 N
Clamping depth	80 mm
Net weight	1.5 kg
Clamping width	300 mm
Frame material	Steel
Grade	Professional
Type	Clamp
Clamp type	F--shaped
Clamp type	Screw-type
Application	For wood



LEVER

Lever clamp, quick-clamp 80x300

06-03-43

- One of 8 sizes/variants in the Inforce "Lever" family – see the full range table for the rest
- Packed 12 pcs per carton

Max force	157 N
Clamping depth	80 mm
Net weight	0.5 kg
Clamping width	300 mm
Frame material	Plastic
Grade	Professional
Type	Clamp
Clamp type	Quick-clamp
Clamp type	Lever-type
Application	For wood, metal, plastic



QUICK-CLAMP

Quick-clamp 60x150mm

06-03-33

- One of 11 sizes/variants in the Inforce "Quick-Clamp" family – see the full range table for the rest
- Packed 12 pcs per carton

Max force	980 N
Clamping depth	60 mm
Dimensions (unpackaged)	338x178x35
Net weight	0.4 kg
Clamping width	150 mm
Frame material	Steel
Grade	Professional
Type	Clamp
Clamp type	Quick-clamp
Clamp type	Lever-type



QUICK-CLAMP

Quick-clamp 60x300mm

06-03-34

- One of 11 sizes/variants in the Inforce "Quick-Clamp" family – see the full range table for the rest
- Packed 12 pcs per carton

Max force	980 N
Clamping depth	60 mm
Dimensions (unpackaged)	495x195x45 mm
Net weight	0.3 kg
Clamping width	300 mm
Frame material	Steel
Grade	Professional
Type	Clamp
Clamp type	Quick-clamp
Clamp type	Lever-type



QUICK-CLAMP

Quick-Clamp, 90x90 mm

06-03-25

- Largest quick-action bar clamp in the 90 mm range (up to 900 mm)
- Shorter 90mm and 60mm-jaw versions, F-clamps and spring clamps also available – see the full range table

Max force	2200 N
Clamping depth	90 mm
Dimensions (unpackaged)	1174x240x35 mm
Net weight	1.65 kg
Clamping width	900 mm
Frame material	Steel
Grade	Professional
Type	Clamp
Clamp type	Quick-clamp
Clamp type	Lever-type



SPRING CLAMP

Spring clamp 100mm

06-03-54

- One of 4 sizes/variants in the Inforce "Spring Clamp" family – see the full range table for the rest
- Packed 50 pcs per carton

Clamping depth	100 mm
Working stroke	100 mm
Length	245 mm
Clamping force	15 kg
Net weight	0.229 kg
Jaw material	Impact-resistant Plastic (ABS-Plastic)
Handle material	ABS plastic
Frame material	Impact-resistant Plastic (ABS-Plastic)
Grade	Professional
Jaw shape	Half-round



SPRING CLAMP

Spring clamp 50mm

06-03-52

- One of 4 sizes/variants in the Inforce "Spring Clamp" family – see the full range table for the rest
- Packed 60 pcs per carton

Clamping depth	70 mm
Working stroke	50 mm
Length	200 mm
Clamping force	15 kg
Net weight	0.177 kg
Jaw material	Impact-resistant Plastic (ABS-Plastic)
Handle material	ABS plastic
Frame material	Impact-resistant Plastic (ABS-Plastic)
Grade	Professional
Jaw shape	Half-round



SPRING CLAMP

Spring clamp 75mm

06-03-42

- One of 4 sizes/variants in the Inforce "Spring Clamp" family – see the full range table for the rest
- Packed 80 pcs per carton

Clamping depth	70 mm
Working stroke	75 mm
Length	170 mm
Clamping force	15 kg
Net weight	0.1 kg
Jaw material	Plastic
Handle material	Plastic
Frame material	Plastic
Grade	Semi-professional
Jaw shape	Half-round



UTILITY

Utility knife 18 mm in metal housing with screw clamp

06-02-12

- One of 5 sizes/variants in the Inforce "Utility" family – see the full range table for the rest
- Packed 72 pcs per carton

Overall length	163 mm
Blade length	108 mm
Dimensions (unpacked)	160x35x23
Net weight	0.12 kg
Blade width	18 mm
Blade thickness	0.5 mm
Handle material	Metal
Blade material	Titanium
Spare blades included	5 pcs



BENT

Bent long-nose pliers 160mm

06-18-08

- Standalone item in the Inforce consumables/hand tools range
- Packed 60 pcs per carton

Length	160 mm
Jaw length	53 mm
Net weight	0.15 kg
Jaw material	Steel
Grade	Professional
Type	Long-nose pliers
Jaw shape	Curved
Handle colour	Black/yellow
Handle sleeves	Two-component
Curved	Yes



COMBINATION

Combination Pliers, 200 mm

06-18-69

- General-purpose combination pliers, largest size in the 160-200 mm range
- Nickel-plated and professional-grade versions also available – see the full range table

Length	200 mm
Net weight	0.35 kg
Jaw material	CrV
Grade	Professional
Type	Combination pliers
Jaw shape	Straight Pointed with Half-round & cutting edge
Handle colour	Black/yellow
Handle sleeves	Two-component
Round-cable stripping	Yes



INSULATED DIAGONAL

Insulated diagonal cutting pliers 180 mm 1000V

06-18-17

- Standalone item in the Inforce consumables/hand tools range
- Packed 60 pcs per carton

Length	180 mm
Net weight	0.24 kg
Jaw material	CrV
Grade	Professional
Kind	Side cutters
Type	Diagonal/Side
Cut type	Compact External Bevel
Blade grind type	Standard
Insulated (VDE) coating	Yes
Handle colour	Yellow/Red



NICKEL-PLATED COMBINATION

Nickel-plated combination pliers 180 mm

06-18-42

- One of 2 sizes/variants in the Inforce "Nickel-Plated Combination" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	180 mm
Net weight	0.27 kg
Jaw material	CrV
Grade	Professional
Type	Combination pliers
Jaw shape	Straight with Half-round & cutting edge
Handle colour	Black/yellow
Handle sleeves	Two-component
Wire-cutting jaws	Yes
Serration	Partial



NICKEL-PLATED COMBINATION

Nickel-plated combination pliers 200 mm

06-18-43

- One of 2 sizes/variants in the Inforce "Nickel-Plated Combination" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	200 mm
Net weight	0.33 kg
Jaw material	CrV
Grade	Professional
Type	Combination pliers
Jaw shape	Straight with Half-round & cutting edge
Handle colour	Black/yellow
Handle sleeves	Two-component
Wire-cutting jaws	Yes
Serration	Partial



NICKEL-PLATED DIAGONAL

Nickel-plated diagonal cutting pliers 160 mm

06-18-44

- One of 2 sizes/variants in the Inforce "Nickel-Plated Diagonal" family – see the full range table for the rest
- Packed 60 pcs per carton

Rod diameter	2 mm
Length	160 mm
Net weight	0.2 kg
Jaw material	CrV
Grade	Professional
Kind	Side cutters
Type	Diagonal/Side
Cut type	Compact External Bevel
Blade grind type	Standard
Handle colour	Black/yellow



NICKEL-PLATED DIAGONAL

Nickel-plated diagonal cutting pliers 180 mm

06-18-45

- One of 2 sizes/variants in the Inforce "Nickel-Plated Diagonal" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	180 mm
Net weight	0.25 kg
Jaw material	CrV
Grade	Professional
Kind	Side cutters
Type	Diagonal/Side
Cut type	Compact External Bevel
Blade grind type	Standard
Handle colour	Black/yellow
Handle sleeves	Two-component



NICKEL-PLATED LONG-NOSE

Nickel-plated long-nose pliers 160 mm

06-18-46

- One of 2 sizes/variants in the Inforce "Nickel-Plated Long-Nose" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	160 mm
Jaw length	55 mm
Net weight	0.14 kg
Jaw material	CrV
Grade	Professional
Type	Long-nose pliers
Jaw shape	Straight
Handle colour	Black/yellow
Handle sleeves	Two-component
With cutting edge	Yes



NICKEL-PLATED LONG-NOSE

Nickel-plated long-nose pliers 200 mm

06-18-47

- One of 2 sizes/variants in the Inforce "Nickel-Plated Long-Nose" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	200 mm
Jaw length	76 mm
Net weight	0.23 kg
Jaw material	CrV
Grade	Professional
Type	Long-nose pliers
Jaw shape	Straight
Handle colour	Black/yellow
Handle sleeves	Two-component
With cutting edge	Yes



PROFESSIONAL DIAGONAL

Professional diagonal cutting pliers 160 mm

06-18-04

- One of 4 sizes/variants in the Inforce "Professional Diagonal" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	160 mm
Net weight	0.18 kg
Jaw material	CrV
Grade	Household
Kind	Side cutters
Type	Diagonal/Side
Cut type	Compact External Bevel
Blade grind type	Standard
Handle colour	Black/yellow
Handle sleeves	Two-component



PROFESSIONAL DIAGONAL

Professional diagonal cutting pliers 160 mm

06-18-70

- One of 4 sizes/variants in the Inforce "Professional Diagonal" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	160 mm
Net weight	0.18 kg
Jaw material	CrV
Grade	Professional
Kind	Side cutters
Type	Diagonal/Side
Cut type	Compact External Bevel
Blade grind type	Standard
Handle colour	Black/yellow
Handle sleeves	Two-component



PROFESSIONAL DIAGONAL

Professional diagonal cutting pliers 180 mm

06-18-05

- One of 4 sizes/variants in the Inforce "Professional Diagonal" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	180 mm
Net weight	0.25 kg
Jaw material	Steel 45
Grade	Professional
Kind	Side cutters
Type	Diagonal/Side
Cut type	Compact External Bevel
Blade grind type	Standard
Handle colour	Black/yellow
Handle sleeves	Two-component



PROFESSIONAL LONG-NOSE

Professional long-nose pliers 160 mm

06-18-06

- One of 4 sizes/variants in the Inforce "Professional Long-Nose" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	160 mm
Jaw length	55 mm
Net weight	0.13 kg
Jaw material	Steel
Grade	Household
Type	Long-nose pliers
Jaw shape	Straight
Handle colour	Black/yellow
Handle sleeves	Two-component
With cutting edge	Yes



PROFESSIONAL LONG-NOSE

Professional long-nose pliers 160 mm

06-18-72

- One of 4 sizes/variants in the Inforce "Professional Long-Nose" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	160 mm
Jaw length	55 mm
Net weight	0.13 kg
Jaw material	Steel
Grade	Professional
Type	Long-nose pliers
Jaw shape	Straight
Handle colour	Black/yellow
Handle sleeves	Two-component
With cutting edge	Yes



PROFESSIONAL LONG-NOSE

Professional long-nose pliers 200 mm

06-18-07

- One of 4 sizes/variants in the Inforce "Professional Long-Nose" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	200 mm
Jaw length	76 mm
Net weight	0.19 kg
Jaw material	Steel
Grade	Household
Type	Long-nose pliers
Jaw shape	Straight
Handle colour	Black/yellow
Handle sleeves	Two-component
With cutting edge	Yes



CARPENTER'S

Carpenter's (roofer's) hammer 600 g

06-16-07

- Standalone item in the Inforce consumables/hand tools range
- Packed 24 pcs per carton

Overall length	340 mm
Net weight	0.8 kg
Handle material	Two-component
Striker material	Steel
Application	For roofing work
Striker shape	Square
Striker weight	600 g
Magnetic nail holder	Yes



FLAT

Flat chisel 1 1/4", 32 mm

06-15-05

- One of 5 sizes/variants in the Inforce "Flat" family – see the full range table for the rest
- Packed 30 pcs per carton

Length	265 mm
Blade length	102 mm
Net weight	0.325 kg
Cutting part width	32 mm
Blade material	Steel
Handle material	Two-component
Impact function	Yes
Carpenter's	Yes



FLAT

Flat chisel 1", 25 mm

06-15-11

- One of 5 sizes/variants in the Inforce "Flat" family – see the full range table for the rest
- Packed 30 pcs per carton

Length	265 mm
Blade length	102 mm
Net weight	0.305 kg
Cutting part width	25 mm
Blade material	Steel
Handle material	Two-component
Impact function	Yes
Carpenter's	Yes



FLAT

Flat chisel 1/2", 12 mm

06-15-08

- One of 5 sizes/variants in the Inforce "Flat" family – see the full range table for the rest
- Packed 30 pcs per carton

Length	265 mm
Blade length	102 mm
Net weight	0.29 kg
Cutting part width	12 mm
Blade material	Steel
Handle material	Two-component
Impact function	Yes
Carpenter's	Yes



FORGED

Forged machinist's hammer 300g

06-16-12

- One of 2 sizes/variants in the Inforce "Forged" family – see the full range table for the rest
- Packed 12 pcs per carton

Net weight	0.63 kg
Overall length	310 mm
Handle material	Two-component
Striker material	Steel
Application	For for locksmith/fitter's vices work
Striker shape	Square
Striker weight	300 g
Forged	Yes



FORGED

Forged machinist's hammer 500g

06-16-13

- One of 2 sizes/variants in the Inforce "Forged" family – see the full range table for the rest
- Packed 12 pcs per carton

Net weight	0.9 kg
Overall length	310 mm
Handle material	Two-component
Striker material	Steel
Application	For for locksmith/fitter's vices work
Striker shape	Square
Striker weight	500 g
Forged	Yes



MACHINIST'S

Machinist's hammer 300g

06-16-08

- One of 4 sizes/variants in the Inforce "Machinist's" family – see the full range table for the rest
- Packed 36 pcs per carton

Net weight	0.5 kg
Overall length	300 mm
Handle material	Two-component
Striker material	Carbon steel
Application	For for locksmith/fitter's vices work
Striker shape	Square
Striker weight	300 g



MACHINIST'S

Machinist's hammer 500g

06-16-09

- One of 4 sizes/variants in the Inforce "Machinist's" family – see the full range table for the rest
- Packed 12 pcs per carton

Net weight	0.7 kg
Overall length	320 mm
Handle material	Two-component
Striker material	Carbon steel
Application	For for locksmith/fitter's vices work
Striker shape	Square
Striker weight	500 g



MACHINIST'S

Machinist's Hammer, 1000 g

06-16-11

- Machinist's hammer, top weight in the 300-1000 g range
- Forged and standard versions also available – see the full range table

Net weight	1.25 kg
Overall length	360 mm
Handle material	Two-component
Striker material	Carbon steel
Application	For for locksmith/fitter's vices work
Striker shape	Square
Striker weight	1000 g



MINI NAIL-PULLER

Mini nail-puller bar, 250x21x9mm

06-16-27

- Standalone item in the Inforce consumables/hand tools range
- Packed 36 pcs per carton

Profile diameter/size	21x9 mm
Length	250 mm
Net weight	0.406 kg
Grade	Professional
Type	Crowbar-Nail puller
Shape	Flat
Forged	Yes



NAIL-PULLER

Nail-puller bar, flat-profile, 380x35x8mm

06-16-29

- One of 5 sizes/variants in the Inforce "Nail-Puller" family – see the full range table for the rest
- Packed 24 pcs per carton

Profile diameter/size	35x8 mm
Length	380 mm
Net weight	0.779 kg
Grade	Professional
Type	Crowbar-Nail puller
Shape	Flat
Forged	Yes



NAIL-PULLER

Nail-puller bar, I-beam profile, 450x29x16 mm

06-16-26

- One of 5 sizes/variants in the Inforce "Nail-Puller" family – see the full range table for the rest
- Packed 10 pcs per carton

Profile diameter/size	29x16 mm
Length	450 mm
Net weight	1.5 kg
Grade	Professional
Type	Crowbar-Nail puller
Shape	I-beam
Forged	Yes



NAIL-PULLER

Nail-puller bar, rubberised handle, 300x22x14mm

06-16-28

- One of 5 sizes/variants in the Inforce "Nail-Puller" family – see the full range table for the rest
- Packed 36 pcs per carton

Profile diameter/size	22x14 mm
Length	300 mm
Net weight	0.544 kg
Handle material	Rubber
Grade	Professional
Type	Crowbar-Nail puller
Shape	Flat
Forged	Yes
Handle	Yes



CAST HAND

Cast hand rivet gun 2.4-4.8 mm

06-14-10

- One of 2 sizes/variants in the Inforce "Cast Hand" family – see the full range table for the rest
- Packed 24 pcs per carton

Min rivet diameter	2.4 mm
Max rivet diameter	4.8 mm
Net weight	0.6 kg
Max clamping thickness	45 mm
Grade	Professional
Rivet material	Aluminium/Steel
Included accessories	Rivet gun
Type	Lever-type
Rivet type	Blind (pull)
Packaging kind	Blister pack



CAST SWIVEL-HEAD

Cast swivel-head hand 360 deg. rivet gun 2.4-4.8 mm

06-14-11

- One of 2 sizes/variants in the Inforce "Cast Swivel-Head" family – see the full range table for the rest
- Packed 24 pcs per carton

Max material thickness	45 mm
Rivet type	Blind (pull) rivets
Rivet material	Aluminium/steel
Packaging	Blister
Head type	Swivel (360°)
Rivet sizes	2.4 / 3.2 / 4.0 / 4.8 mm
Net weight	0.9 kg



CAST SWIVEL-HEAD

Cast Swivel-Head Rivet Gun, in Case, with Rivets

06-14-111

- Cast-body rivet gun with a 360° swivelling head for tight spaces
- Fixed-head version also available – see the full range table

Min rivet diameter	2.4 mm
Max rivet diameter	4.8 mm
Net weight	1.01 kg
Max clamping thickness	45 mm
Grade	Professional
Rivet material	Aluminium/Steel
Included accessories	Rivets 2.4;3.2;4.8 mm; Rivet gun
Type	Swivel
Rivet type	Blind (pull)



CLOSED-FRAME

Closed-frame sealant gun 400 ml

01-13-11

- One of 2 sizes/variants in the Inforce "Closed-Frame" family – see the full range table for the rest
- Packed 12 pcs per carton

Cylinder capacity	0.4 l
Rod diameter	8 mm
Dimensions (unpacked)	480x65x210
Net weight	0.75 kg
Housing material	ABS-Plastic
Type	For sealants
Design	Closed
Packaging kind	Without packaging
Power supply	Mechanical
Splash-proof	Yes



CLOSED-FRAME

Closed-frame sealant gun 600 ml

01-13-12

- One of 2 sizes/variants in the Inforce "Closed-Frame" family – see the full range table for the rest
- Packed 12 pcs per carton

Cylinder capacity	0.6 l
Rod diameter	8 mm
Dimensions (unpacked)	526x193x71 mm
Net weight	0.85 kg
Housing material	ABS-Plastic
Type	For sealants
Design	Closed
Packaging kind	Without packaging
Power supply	Mechanical
Splash-proof	Yes



HALF-OPEN-FRAME

Half-open-frame sealant gun

01-13-02

- Standalone item in the Inforce consumables/hand tools range
- Packed 24 pcs per carton

Cylinder capacity	0.31 l
Rod diameter	8 mm
Dimensions (unpacked)	340x180x60 mm
Net weight	0.33 kg
Housing material	Impact-resistant Plastic
Type	For adhesives & sealants
Design	Semi-closed
Packaging kind	Bag
Power supply	Mechanical



PROFESSIONAL GREASE

Professional grease gun, quick-release (hose+tube) 690atm, 520cm³

08-09-15

- Standalone item in the Inforce consumables/hand tools range
- Packed 16 pcs per carton

Type	Grease gun (pump)
Operating pressure	350 atm
Grease capacity	520 cm³
Kit includes	Hose
Max grease grade	NLGI 3
Connection thread	1/8" BSPT
Hose length	0.3 m
Air bleed valve	Yes
Dimensions (unpacked)	423x141x63 mm




PROFESSIONAL HEAVY-GREASE

Professional heavy-grease gun, quick-release (hose+tube) 400cm³

08-09-20

- One of 2 sizes/variants in the Inforce "Professional Heavy-Grease" family – see the full range table for the rest
- Packed 16 pcs per carton

Working pressure	310 atm
Grease capacity	400 cm³
Hose length	0.29 m
Dimensions (unpacked)	140x395x65
Net weight	1.6 kg
Grade	Household
Included accessories	Hose + tube with with nozzle
Type	Grease gun
Works with 400 g cartridge	Yes

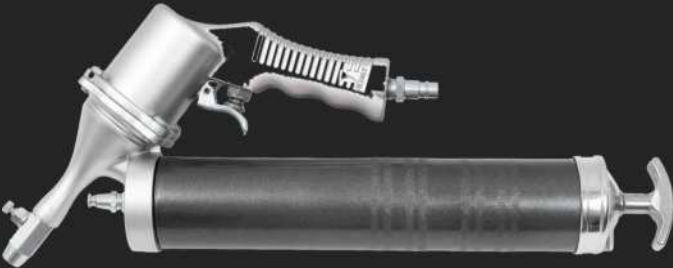

PROFESSIONAL HEAVY-GREASE

Professional heavy-grease gun, quick-release (hose+tube) 520cm3

08-09-17

- One of 2 sizes/variants in the Inforce "Professional Heavy-Grease" family – see the full range table for the rest
- Packed 10 pcs per carton

Working pressure	290 atm
Grease capacity	520 cm³
Hose length	0.32 m
Feed per piston stroke	5 strokes/min
Dimensions (unpacked)	385x170x75 mm
Net weight	1.6 kg
Included accessories	Hose + tube with with nozzle
Type	Grease gun
Air consumption	100 l/min



PROFESSIONAL MINI

08-09-16

- Professional mini heavy-grease gun, quick-release (hose+tube) 300atm, 150cm3
- Standalone item in the Inforce consumables/hand tools range
- Packed 20 pcs per carton

Type	Grease gun
Operating pressure	200 atm
Grease capacity	150 cm³
Kit includes	Tube + nozzle
Max grease grade	NLGI 2
One-hand operation	Yes
Net weight	0.7 kg
Grade	Professional



PROFESSIONAL SEALANT

Professional sealant gun

01-13-01

- One of 2 sizes/variants in the Inforce "Professional Sealant" family – see the full range table for the rest
- Packed 24 pcs per carton

Cylinder capacity	0.31 l
Rod diameter	7 mm
Dimensions (unpacked)	400x180x70 mm
Net weight	0.445 kg
Housing material	Impact-resistant Plastic
Type	For adhesives & sealants
Design	Semi-closed
Packaging kind	Bag
Power supply	Mechanical
Splash-proof	Yes



PROFESSIONAL SEALANT

Professional sealant gun with auto-stop

01-13-04

- One of 2 sizes/variants in the Inforce "Professional Sealant" family – see the full range table for the rest
- Packed 24 pcs per carton

Cylinder capacity	0.31 l
Rod diameter	8 mm
Dimensions (unpacked)	390x190x60 mm
Net weight	0.4 kg
Housing material	Impact-resistant Plastic
Type	For sealants
Design	Semi-closed
Packaging kind	Bag
Power supply	Mechanical
Splash-proof	Yes



PROFESSIONAL SWIVEL
Professional swivel sealant gun

01-13-10

- Standalone item in the Inforce consumables/hand tools range
- Packed 24 pcs per carton

Cylinder capacity	0.31 l
Rod diameter	7 mm
Dimensions (unpacked)	335x210x50
Net weight	0.445 kg
Housing material	ABS-Plastic
Type	For sealants
Design	Semi-closed
Packaging kind	Without packaging
Power supply	Mechanical
Splash-proof	Yes



SEALANT
Sealant smoothing tool

06-04-02

- Standalone item in the Inforce consumables/hand tools range
- Packed 120 pcs per carton

Dimensions (unpacked)	235x75x15
Net weight	0.021 kg
Blade width	20 mm
Blade thickness	5 mm
Blade height	25 mm
Blade material	Silicone
Handle material	Plastic
Pack quantity	1



PROFESSIONAL STAPLE
Professional staple gun 6 in 1

06-14-07

- Standalone item in the Inforce consumables/hand tools range
- Packed 16 pcs per carton

Compatible cutting consumable	Staples, nails (pins), staples
Nail length	15 mm
Min nail length	15 mm
Max nail length	15 mm
Staple length	15 mm
Min staple length	15 mm
Max staple length	15 mm
Net weight	1 kg
Dimensions (unpacked)	250x220x46 mm
Max clamping thickness	14 mm



STAPLE
Staple remover

06-14-08

- Standalone item in the Inforce consumables/hand tools range
- Packed 40 pcs per carton

Length	160 mm
Net weight	0.1 kg
Dimensions (unpacked)	160x30x40 mm
Material	Metal/Plastic
Staple type	Universal
Colour	Black



AUTO-LOCK

Auto-lock utility knife 18 mm

06-02-16

- Standalone item in the Inforce consumables/hand tools range
- Packed 96 pcs per carton

Overall length	168 mm
Blade length	108 mm
Dimensions (unpackaged)	168x57x22
Net weight	0.07 kg
Blade width	18 mm
Blade thickness	0.6 mm
Handle material	Two-component
Blade material	Carbon steel
Spare blades included	5 pcs
Pack quantity	1 pcs



BLADES

Blades 18mm titanium-coated 10 pcs in pack

11-03-10

- One of 4 sizes/variants in the Inforce "Blades" family – see the full range table for the rest
- Packed 200 pcs per carton

Length	108 mm
Width	18 mm
Thickness	0.5 mm
Material	Steel SK5
Quantity	10 pcs
Number of segments	7 pcs
Shape	Segmented
Coating	Titanium nitride



BLADES

Blades 18 mm titanium-coated 50 pcs in pack

11-03-13

- One of 4 sizes/variants in the Inforce "Blades" family – see the full range table for the rest
- Packed 48 pcs per carton

Length	108 mm
Width	18 mm
Thickness	0.5 mm
Material	Steel SK5
Quantity	50 pcs
Number of segments	7 pcs
Shape	Segmented
Coating	Titanium nitride



BLADES

Blades 9 mm titanium-coated 50 pcs in pack

11-03-12

- One of 4 sizes/variants in the Inforce "Blades" family – see the full range table for the rest
- Packed 96 pcs per carton

Length	84 mm
Width	9 mm
Thickness	0.4 mm
Material	Steel SK5
Quantity	50 pcs
Number of segments	12 pcs
Shape	Segmented
Coating	Titanium nitride



TITANIUM-COATED

Titanium-coated trapezoid blades 10 pcs in pack

11-03-11

- Standalone item in the Inforce consumables/hand tools range
- Packed 400 pcs per carton

Length	61 mm
Width	19 mm
Thickness	0.6 mm
Material	Steel SK5
Quantity	10 pcs
Shape	Trapezoid
Sharpening angle	10 °
Coating	Titanium-coated




TRAPEZOID

Trapezoid utility knife with two blade types

06-02-08

- Standalone item in the Inforce consumables/hand tools range
- Packed 48 pcs per carton

Blade length	61 mm
Overall length	170 mm
Net weight	0.26 kg
Dimensions (unpacked)	180x22x45
Blade width	19 mm
Handle material	Metal
Blade material	SK5
Blade thickness	0.6 mm
Grade	Professional
Design	Retractable

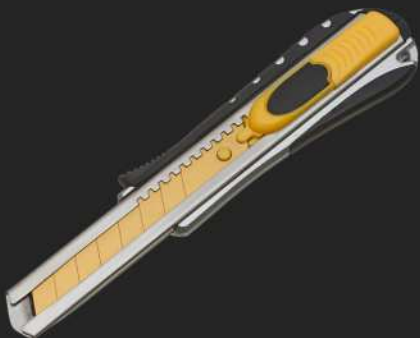

UTILITY

Utility knife 18 mm in metal housing

06-02-10

- One of 5 sizes/variants in the Inforce "Utility" family – see the full range table for the rest
- Packed 48 pcs per carton

Overall length	188 mm
Blade length	108 mm
Dimensions (unpacked)	185x25x38
Net weight	0.17 kg
Blade width	18 mm
Blade thickness	0.5 mm
Handle material	Metal
Blade material	Titanium
Spare blades included	5 pcs
Pack quantity	1 pcs



UTILITY

Utility knife 25 mm in metal housing

06-02-14

- One of 5 sizes/variants in the Inforce "Utility" family – see the full range table for the rest
- Packed 36 pcs per carton

Overall length	208.5 mm
Blade length	120 mm
Dimensions (unpacked)	200x42x23
Net weight	0.3 kg
Blade width	25 mm
Blade thickness	0.6 mm
Handle material	Metal
Blade material	SK5
Spare blades included	5 pcs
Pack quantity	1 pcs



STRAIGHT-CUT

Straight-cut snips 290 mm

06-18-50

- Standalone item in the Inforce consumables/hand tools range
- Packed 48 pcs per carton

Length	290 mm
Length	11.4 "
Cutting edge length	84 mm
Dimensions (unpacked)	290 mm
Net weight	0.51 kg
Metal thickness	1.2 mm
Jaw material	CrMo
Grade	Professional
Type	Straight
Handle sleeves	Rubberised



TIN

Tin snips 250 mm, left cut

06-18-36

- One of 3 sizes/variants in the Inforce "Tin" family – see the full range table for the rest
- Packed 48 pcs per carton

Length	250 mm
Length	10 "
Cutting edge length	50 mm
Net weight	0.33 kg
Metal thickness	1.2 mm
Jaw material	CrMo
Grade	Professional
Type	Left-cut
Handle sleeves	Two-component
Handle colour	Black/yellow



TIN

Tin snips, right cut

06-18-37

- One of 3 sizes/variants in the Inforce "Tin" family – see the full range table for the rest
- Packed 48 pcs per carton

Length	250 mm
Length	10 "
Cutting edge length	50 mm
Net weight	0.5 kg
Metal thickness	1.2 mm
Jaw material	CrMo
Grade	Professional
Type	Right-cut
Handle sleeves	Two-component
Handle colour	Black/yellow



TIN

Tin snips, straight cut

06-18-38

- One of 3 sizes/variants in the Inforce "Tin" family – see the full range table for the rest
- Packed 48 pcs per carton

Length	250 mm
Length	10 "
Cutting edge length	50 mm
Net weight	0.45 kg
Metal thickness	1.2 mm
Jaw material	CrMo
Grade	Professional
Type	Straight
Handle sleeves	Two-component
Handle colour	Black/yellow

BLADES

11-03-09	Blades 9mm titanium-coated 10 pcs in pack
----------	---

COMBINATION

06-18-01	Combination pliers 160 mm
06-18-67	Combination pliers 160 mm
06-18-02	Combination pliers 180 mm
06-18-68	Combination pliers 180 mm
06-18-03	Combination pliers 200 mm

CORNER

06-03-46	Corner clamp 69 mm
----------	--------------------

FLAT

06-15-09	Flat chisel 1/4", 6 mm
06-15-07	Flat chisel 3/4", 18 mm

IMPACT SCREWDRIVER

06-09-85	Impact screwdriver PH1x75mm
06-09-86	Impact screwdriver PH2x100mm
06-09-89	Impact screwdriver SL6.5x125mm
06-09-90	Impact screwdriver SL8x150mm

INSULATED SCREWDRIVER

06-09-75	Insulated screwdriver PH2x100mm
06-09-76	Insulated screwdriver PH3x150mm
06-09-77	Insulated screwdriver SL3x80mm
06-09-78	Insulated screwdriver SL4x100mm
06-09-79	Insulated screwdriver SL5.5x125mm
06-09-80	Insulated screwdriver SL6.5x150mm
06-09-81	Insulated screwdriver SL8x175mm

LEVER

06-05-111	Lever pipe wrench No. 1, type L
06-05-112	Lever pipe wrench No. 2, type L
06-05-113	Lever pipe wrench No. 3, type L
06-05-116	Lever pipe wrench No. 3, type S
06-05-117	Lever pipe wrench No. 4, type L

MACHINIST'S

06-16-10	Machinist's hammer 800g
----------	-------------------------

NAIL-PULLER

06-16-25	Nail-puller bar, I-beam profile, 600x30x17 mm
06-16-24	Nail-puller bar, I-beam profile, 900x30x17 mm

PROFESSIONAL DIAGONAL

06-18-71	Professional diagonal cutting pliers 180 mm
----------	---

PROFESSIONAL LONG-NOSE

06-18-73	Professional long-nose pliers 200 mm
----------	--------------------------------------

QUICK-CLAMP

06-03-35	Quick-clamp 60x450mm
06-03-36	Quick-clamp 60x600mm
06-03-21	Quick-clamp 90x150mm
06-03-22	Quick-clamp 90x300mm
06-03-23	Quick-clamp 90x450mm
06-03-24	Quick-clamp 90x600mm
06-03-34-2	Quick-clamp clamps 60x300mm, 2 pcs
06-03-51	Quick-clamp connector

SCREWDRIVER

06-09-64	Screwdriver ProExpert PZ2x100
06-09-67	Screwdriver TORX ProExpert T10x80
06-09-68	Screwdriver TORX ProExpert T20x100
06-09-70	Screwdriver TORX ProExpert T30x125
06-09-66	Screwdriver TORX ProExpert T8x60

SLOTTED

06-09-61	Slotted screwdriver ProExpert SL6x150
06-09-62	Slotted screwdriver ProExpert SL8x150

SPRING CLAMP

06-03-53	Spring clamp 75mm
----------	-------------------

UTILITY

06-02-13	Utility knife 25 mm in metal housing with screw clamp
06-02-17	Utility knife with screw lock 18 mm

INFORCE



SECTION / 04

MEASURING TOOLS & STORAGE SYSTEMS

Tape measures, levels, calipers, multimeters, tool bags, boxes and MODULAR SYSTEM cases



CLAMP

Clamp meter

01-05-12

- Standalone item in the Inforce consumables/hand tools range
- Packed 40 pcs per carton

Battery count & voltage	2x1.5B
Max DC voltage	600 V
Max AC voltage	600 V
Max capacity	4000 µF
Dimensions (unpacked)	215x63x36
Net weight	0.248 kg
Included accessories	Bag/Pouch
Backlit display	Yes
Batteries	AAA/Pinky (compact) (R03;LR03;FR03)
Clamp size	28 mm



DIGITAL

Digital Auto-Range Clamp Meter

01-05-11

- Auto-range digital clamp meter for AC current, voltage, resistance and continuity
- A non-auto-range clamp meter and additional multimeters are also available – see the full range table

Battery count & voltage	2x1.5B
Max DC voltage	600 V
Max AC voltage	600 V
Dimensions (unpacked)	235x90x57 mm
Net weight	0.41 kg
Included accessories	Bag/Pouch
Backlit display	Yes
Batteries	AAA/Pinky (compact) (R03;LR03;FR03)
Clamp size	28 mm



POCKET

Pocket multimeter + continuity tester

01-05-05

- One of 2 sizes/variants in the Inforce "Pocket" family – see the full range table for the rest
- Packed 60 pcs per carton

Battery count & voltage	2x1.5B
AC voltage	600 V
Max AC voltage	600 V
DC voltage	600 V
Max DC voltage	600 V
Capacity	0 µF
Input impedance	10 Mohm
Dimensions (unpacked)	47x77x134 mm
Net weight	0.206 kg
Grade	Professional



POCKET

Pocket multimeter with battery tester

01-05-04

- One of 2 sizes/variants in the Inforce "Pocket" family – see the full range table for the rest
- Packed 60 pcs per carton

Battery count & voltage	2x1.5B
AC voltage	600 V
Min AC voltage	0,02
Max AC voltage	600 V
DC voltage	600 V
Min DC voltage	0,02
Max DC voltage	600 V
Input impedance	10 Mohm
Dimensions (unpacked)	47x77x134 mm
Net weight	0.206 kg



UNIVERSAL DIGITAL
Universal digital multimeter

01-05-07

- Standalone item in the Inforce consumables/hand tools range
- Packed 20 pcs per carton

Battery count & voltage	2x1.5B
AC voltage	750 V
Min AC voltage	6 V
Max AC voltage	750 V
DC voltage	1000 V
Min DC voltage	0.6 V
Max DC voltage	1000 V
Capacity	100000 µF
Input impedance	10 Mohm
Dimensions (unpacked)	56x88x183 mm



CALIPER
Caliper 0-150mm/0-6"*0.05mm/ 1/128"

06-11-36

- One of 3 sizes/variants in the Inforce "Caliper" family – see the full range table for the rest
- Packed 25 pcs per carton

Internal-diameter measurement	Yes
Net weight	0.15 kg
Rod material	Stainless steel
Jaw material	Stainless steel
Grade	Professional
Type	Vernier
Kind	Vernier caliper (Type I)
Marking type	Engraved
Tolerance	30 µm
Step size	0.05 mm



CALIPER
Caliper 0-200mm/0-8"*0.05mm/ 1/128"

06-11-37

- One of 3 sizes/variants in the Inforce "Caliper" family – see the full range table for the rest
- Packed 30 pcs per carton

Internal-diameter measurement	Yes
Net weight	0.185 kg
Rod material	Steel
Jaw material	Steel
Grade	Semi-professional
Type	Vernier
Kind	Vernier caliper (Type I)
Marking type	Engraved
Tolerance	30 µm
Step size	0.05 mm



CALIPER
Caliper 0-300mm/0-12"*0.05mm/ 1/128"

06-11-38

- One of 3 sizes/variants in the Inforce "Caliper" family – see the full range table for the rest
- Packed 20 pcs per carton

Internal-diameter measurement	Yes
Net weight	0.37 kg
Rod material	Steel
Jaw material	Steel
Grade	Semi-professional
Type	Vernier
Kind	Vernier caliper (Type I)
Marking type	Engraved
Tolerance	30 µm
Step size	0.05 mm



DIGITAL

Digital Caliper, 0-200 mm

06-11-40

- Digital caliper, largest of the 150/200/300 mm digital range
- Mechanical vernier calipers also available – see the full range table

Internal-diameter measurement	Yes
Net weight	0.18 kg
Rod material	Stainless steel
Jaw material	Stainless steel
Grade	Professional
Type	Digital
Kind	Digital caliper-I
Marking type	Engraved
Tolerance	30 µm
Step size	0.01 mm



DIGITAL

Digital Micrometer, 0-25 mm

06-11-44

- Digital outside micrometer, first step of the 0-25/25-50 mm range
- Mechanical (vernier) micrometers also available – see the full range table

Net weight	0.19 kg
Grade	Professional
Tolerance	2 µm
Accuracy class	1
Design/version	MKTs
Measuring up to	25 mm
Measuring range	0-25 mm
Measurement step	0.001 mm
Batteries	CR2032



MICROMETER

Micrometer 0-25mm*0.01mm

06-11-41

- One of 3 sizes/variants in the Inforce "Micrometer" family – see the full range table for the rest
- Packed 50 pcs per carton

Net weight	0.185 kg
Grade	Professional
Tolerance	4 µm
Accuracy class	1
Design/version	Morse taper (MT)
Measuring up to	25 mm
Measuring range	0-25 mm
Measurement step	0.01 mm
Batteries	Not required



MICROMETER

Micrometer 25-50mm*0.01mm

06-11-42

- One of 3 sizes/variants in the Inforce "Micrometer" family – see the full range table for the rest
- Packed 34 pcs per carton

Net weight	0.16 kg
Grade	Professional
Tolerance	4 µm
Accuracy class	1
Design/version	Morse taper (MT)
Measuring up to	50 mm
Measuring range	25-50 mm
Measurement step	0.01 mm
Batteries	Not required




MICROMETER
Micrometer 50-75mm*0.01mm

06-11-43

- One of 3 sizes/variants in the Inforce "Micrometer" family – see the full range table for the rest
- Packed 30 pcs per carton

Net weight	0.27 kg
Grade	Professional
Tolerance	5 µm
Accuracy class	1
Design/version	Morse taper (MT)
Measuring up to	75 mm
Measuring range	50-75 mm
Measurement step	0.01 mm
Batteries	Not required

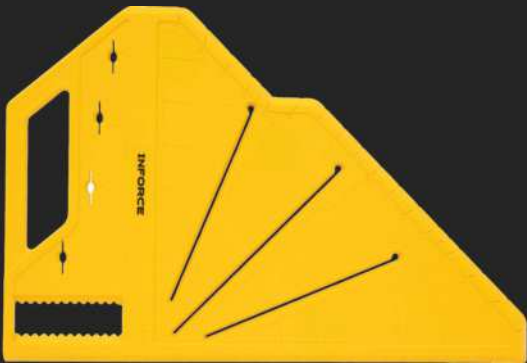

CARPENTER'S
Carpenter's marking square

06-11-87

- Standalone item in the Inforce consumables/hand tools range
- Packed 30 pcs per carton

Length, longer side	307 mm
Length, shorter side	205 mm
Dimensions (unpacked)	310x205x24
Net weight	0.182 kg
Material	ABS plastic
Grade	Professional
Type	Carpenter's Square
Marking type	Stamped
45° square	Yes
Scale division	10 mm



ENGINEER'S
Engineer's square 400x600 mm

06-11-68

- Standalone item in the Inforce consumables/hand tools range
- Packed 36 pcs per carton

Length, longer side	600 mm
Length, shorter side	400 mm
Dimensions (unpacked)	600x400x3 mm
Net weight	0.36 kg
Material	Aluminium
Grade	Professional
Type	All-metal Square
Marking type	Painted
Two-sided scale	Yes
Scale division	1 mm




MULTIFUNCTION
Multifunction marking square 150 mm

06-11-81

- Standalone item in the Inforce consumables/hand tools range
- Packed 100 pcs per carton

Length, longer side	215 mm
Length, shorter side	74 mm
Dimensions (unpacked)	215x74x63 mm
Net weight	0.14 kg
Material	Aluminium
Grade	Professional
Type	Measuring Square
Marking type	Painted
45° square	Yes
Scale division	1 mm



POLYMER

Polymer clamping square 200x200

06-11-80

- One of 4 sizes/variants in the Inforce "Polymer" family – see the full range table for the rest
- Packed 50 pcs per carton

Length, longer side	200 mm
Length, shorter side	200 mm
Dimensions (unpacked)	200x200 mm
Net weight	0.3 kg
Material	ABS plastic
Grade	Professional
Type	Carpenter's Square
Marking type	Painted
Two-sided scale	Yes
45° square	Yes




POLYMER

Polymer clamping square, 100x100

06-11-85

- One of 4 sizes/variants in the Inforce "Polymer" family – see the full range table for the rest
- Packed 200 pcs per carton

Length, longer side	100 mm
Length, shorter side	100 mm
Dimensions (unpacked)	100x100 mm
Net weight	0.05 kg
Material	ABS plastic
Grade	Professional
Type	Carpenter's Square
Marking type	Painted
Two-sided scale	Yes
45° square	Yes



POLYMER

Polymer clamping square, 150x150

06-11-86

- One of 4 sizes/variants in the Inforce "Polymer" family – see the full range table for the rest
- Packed 50 pcs per carton

Length, longer side	150 mm
Length, shorter side	150 mm
Dimensions (unpacked)	150x150 mm
Net weight	0.116 kg
Material	ABS plastic
Grade	Professional
Type	Carpenter's Square
Marking type	Painted
Two-sided scale	Yes
45° square	Yes



PROTRACTOR

Protractor with ruler 200 mm

06-11-64

- Standalone item in the Inforce consumables/hand tools range
- Packed 100 pcs per carton

Length, longer side	270 mm
Length, shorter side	150 mm
Dimensions (unpacked)	200x80 mm
Net weight	0.08 kg
Material	Aluminium
Grade	Professional
Type	Protractor-protractor
Marking type	Engraved
45° square	Yes



ROOFING

Roofing square 175 mm

06-11-66

- One of 4 sizes/variants in the Inforce "Roofing" family – see the full range table for the rest
- Packed 40 pcs per carton

Length, longer side	175 mm
Length, shorter side	175 mm
Net weight	0.325 kg
Material	Aluminium
Grade	Professional
Type	Roofing Square
Marking type	Engraved
Two-sided scale	Yes
45° square	Yes
Scale division	1 mm




ROOFING

Roofing square 250 mm

06-11-79

- One of 4 sizes/variants in the Inforce "Roofing" family – see the full range table for the rest
- Packed 24 pcs per carton

Length, longer side	353 mm
Length, shorter side	250 mm
Dimensions (unpacked)	353x250x29 mm
Net weight	0.43 kg
Material	Aluminium
Grade	Professional
Type	Roofing Square
Marking type	Painted
Two-sided scale	Yes
45° square	Yes

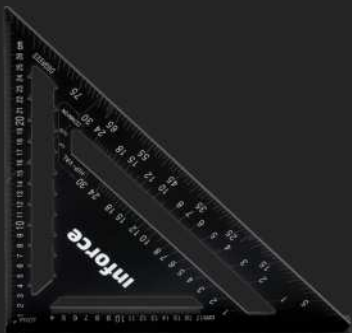


ROOFING

Roofing square 305 mm

06-11-75

- One of 4 sizes/variants in the Inforce "Roofing" family – see the full range table for the rest
- Packed 24 pcs per carton

Length, longer side	305 mm
Length, shorter side	305 mm
Dimensions (unpacked)	430x305x25 mm
Net weight	0.6 kg
Material	Aluminium
Grade	Professional
Type	Roofing Square
Marking type	Etching
Two-sided scale	Yes
45° square	Yes

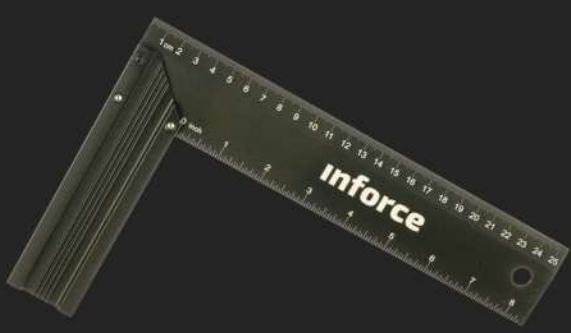


SQUARE

Square 60x250 mm

06-11-65

- One of 4 sizes/variants in the Inforce "Square" family – see the full range table for the rest
- Packed 40 pcs per carton

Length, longer side	250 mm
Length, shorter side	60 mm
Net weight	0.15 kg
Material	Aluminium
Grade	Professional
Type	Marking Square
Marking type	Painted
45° square	Yes
Scale division	1 mm
Metric scale	Yes

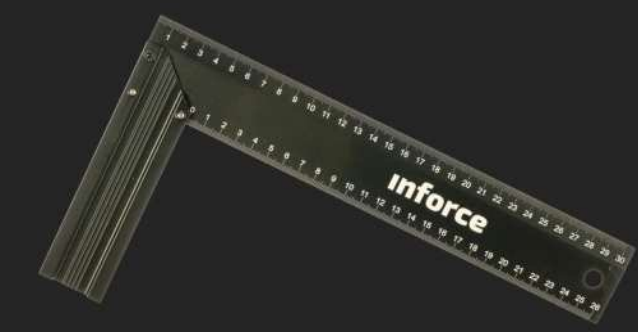

SQUARE
Square 60x300 mm
06-11-69

- One of 4 sizes/variants in the Inforce "Square" family – see the full range table for the rest
- Packed 40 pcs per carton

Length, longer side	305 mm
Length, shorter side	165 mm
Net weight	0.2 kg
Material	Aluminium
Grade	Professional
Type	Marking Square
Marking type	Engraved
45° square	Yes
Scale division	1 mm
Metric scale	Yes



SQUARE
Square with level 150 mm
06-11-77

- One of 4 sizes/variants in the Inforce "Square" family – see the full range table for the rest
- Packed 40 pcs per carton

Length, longer side	150 mm
Length, shorter side	150 mm
Dimensions (unpacked)	Length 150
Net weight	0.2 kg
Material	Aluminium
Grade	Professional
Type	Measuring Square
Marking type	Engraved
Two-sided scale	Yes
45° square	Yes



MAGNETIC
Magnetic level 1000mm
06-11-058

- One of 9 sizes/variants in the Inforce "Magnetic" family – see the full range table for the rest
- Packed 10 pcs per carton

Length	1000 mm
Net weight	0.83 kg
Width	66 mm
Housing material	Aluminium, High-strength ABS-Plastic, thermoplastic Rubber
Grade	Professional
Number of eyelets	3 pcs
Number of handles	2 pcs
Type	Level
Housing type	Box-type
Level type	Block-type



MAGNETIC
Magnetic level 230mm
06-11-054

- One of 9 sizes/variants in the Inforce "Magnetic" family – see the full range table for the rest
- Packed 100 pcs per carton

Length	230 mm
Net weight	0.16 kg
Width	46 mm
Housing material	Aluminium, High-strength ABS-Plastic, thermoplastic Rubber
Grade	Professional
Number of eyelets	3 pcs
Type	Level
Housing type	Box-type
Level type	Block-type
Magnet	Yes



MAGNETIC
Magnetic Level, 2000 mm
06-11-062

- Longest magnetic spirit level in the 400-2000 mm range
- Standard (non-magnetic) levels 400-1000 mm also available – see the full range table

Length	2000 mm
Net weight	1.56 kg
Width	66 mm
Housing material	Aluminium, High-strength ABS-Plastic, thermoplastic Rubber
Grade	Professional
Number of eyelets	3 pcs
Number of handles	2 pcs
Type	Level
Housing type	Box-type
Level type	Block-type



SPIRIT
Spirit level 1000mm
06-11-58

- One of 4 sizes/variants in the Inforce "Spirit" family – see the full range table for the rest
- Packed 10 pcs per carton

Length	1000 mm
Net weight	0.83 kg
Width	66 mm
Housing material	Aluminium, High-strength ABS-Plastic, thermoplastic Rubber
Grade	Professional
Number of eyelets	3 pcs
Number of handles	2 pcs
Type	Level
Housing type	Box-type
Level type	Block-type



SPIRIT
Spirit level 400mm
06-11-55

- One of 4 sizes/variants in the Inforce "Spirit" family – see the full range table for the rest
- Packed 10 pcs per carton

Length	400 mm
Net weight	0.5 kg
Width	66 mm
Housing material	Aluminium, High-strength ABS-Plastic, thermoplastic Rubber
Grade	Professional
Number of eyelets	3 pcs
Type	Level
Housing type	Box-type
Level type	Block-type
Milled	Yes



SPIRIT
Spirit level 600mm
06-11-56

- One of 4 sizes/variants in the Inforce "Spirit" family – see the full range table for the rest
- Packed 10 pcs per carton

Length	600 mm
Net weight	0.7 kg
Width	66 mm
Housing material	Aluminium, High-strength ABS-Plastic, thermoplastic Rubber
Grade	Professional
Number of eyelets	3 pcs
Number of handles	1 pcs
Type	Level
Housing type	Box-type
Level type	Block-type



COMPACT

Compact tape measure 3x16

06-11-72

- One of 3 sizes/variants in the Inforce "Compact" family – see the full range table for the rest
- Packed 100 pcs per carton

Length	3 m
Net weight	0.06 kg
Belt width	16 mm
Housing material	ABS-Plastic
Belt material	Steel
Grade	Professional
Type	Tape measure
Marking type	Painted
Belt size	3 m x 16 mm
Measuring scale	Centimetres



COMPACT

Compact tape measure 5x19

06-11-73

- One of 3 sizes/variants in the Inforce "Compact" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	5 m
Net weight	0.23 kg
Belt width	19 mm
Housing material	ABS-Plastic
Belt material	Steel
Grade	Professional
Type	Tape measure
Marking type	Painted
Belt size	5 m x 19 mm
Measuring scale	Centimetres



COMPACT

Compact tape measure 5x25

06-11-74

- One of 3 sizes/variants in the Inforce "Compact" family – see the full range table for the rest
- Packed 48 pcs per carton

Length	5 m
Net weight	0.27 kg
Belt width	25 mm
Housing material	ABS-Plastic
Belt material	Steel
Grade	Professional
Type	Tape measure
Marking type	Painted
Belt size	5 m x 25 mm
Measuring scale	Centimetres



STAINLESS-STEEL

Stainless-steel body tape measure with auto-lock 5x19mm

GW 06-11-25

- One of 2 sizes/variants in the Inforce "Stainless-Steel" family – see the full range table for the rest
- Packed 60 pcs per carton

Length	5 m
Net weight	0.25 kg
Belt width	19 mm
Housing material	Steel
Belt material	Steel
Grade	Professional
Type	Tape measure
Marking type	Painted
Auto-stop	Yes



STAINLESS-STEEL

Stainless-steel body tape measure with auto-lock 7.5x25mm

GW 06-11-26

- One of 2 sizes/variants in the Inforce "Stainless-Steel" family – see the full range table for the rest
- Packed 36 pcs per carton

Length	7.5 m
Net weight	0.41 kg
Belt width	25 mm
Housing material	Steel
Belt material	Steel
Grade	Professional
Type	Tape measure
Marking type	Painted
Auto-stop	Yes



TAPE

Tape measure 5 m x 27 mm

06-11-82

- One of 10 sizes/variants in the Inforce "Tape" family – see the full range table for the rest
- Packed 48 pcs per carton

Length	5 m
Net weight	0.34 kg
Belt width	27 mm
Housing material	ABS-Plastic; TPR – thermoplastic Rubber
Belt material	Steel with nylon coated
Grade	Professional
Type	Tape measure
Marking type	Painted
Belt size	5 m x 27 mm
Measuring scale	Centimetres



TAPE

Tape measure 5.5x27mm with nylon belt and magnetic hook

06-11-46

- One of 10 sizes/variants in the Inforce "Tape" family – see the full range table for the rest
- Packed 36 pcs per carton

Length	5.5 m
Net weight	0.34 kg
Belt width	27 mm
Housing material	ABS-Plastic; TPR – thermoplastic Rubber
Belt material	Steel with nylon coated
Grade	Semi-professional
Type	Tape measure
Marking type	Painted
Belt size	5.5 m x 27 mm



TAPE

Tape measure 5.5x27mm with nylon hi-vis coating and magnetic hook

06-11-48

- One of 10 sizes/variants in the Inforce "Tape" family – see the full range table for the rest
- Packed 36 pcs per carton

Length	5.5 m
Net weight	0.34 kg
Belt width	27 mm
Housing material	ABS-Plastic; TPR – thermoplastic Rubber
Belt material	Steel with nylon coated
Grade	Professional
Type	Tape measure
Marking type	Painted
Belt size	5.5 m x 27 mm



BUILDER'S
Builder's tool belt

11-25-18

- Standalone item in the Inforce consumables/hand tools range
- Packed 6 pcs per carton

Length	1380 mm
Dimensions (unpacked)	1380x480x105 mm
Net weight	1.68 kg
Material	Polyester
Width	480 mm
Number of sections	3
Type	Bag
Application	For tool
Colour	Black/yellow



PROFESSIONAL MULTIFUNCTION
Professional Multifunction Backpack

11-25-20

- Multi-compartment tool backpack for on-site and van storage
- Tool bags, an organiser bag and a wheeled bag also available – see the full range table

Volume/Capacity	56.1 l
Dimensions (unpacked)	545x380x270
Net weight	3.1 kg
Material	Ballistic-nose Nylon
Material	Ballistic-nose Nylon
Height	545 mm
Width	380 mm
Thickness	270 mm
Number of straps	2
External pockets	6 pcs



OPEN
Open tool bag 14"

11-25-10

- One of 4 sizes/variants in the Inforce "Open" family – see the full range table for the rest
- Packed 4 pcs per carton

Length	350 mm
Depth	305 mm
Material	Canvas
Width	230 mm
Number of pockets	24
Number of sections	2 pcs
Type	Bag
Max load	12 kg
Shoulder strap	Yes
Primary colour	Black/yellow



TOOL
Tool & laptop bag with shoulder strap

11-25-15

- One of 9 sizes/variants in the Inforce "Tool" family – see the full range table for the rest
- Packed 4 pcs per carton

Volume/Capacity	10 l
Length	440 mm
Depth	320 mm
Material	Polyester
Width	120 mm
Number of pockets	23
Number of sections	3 pcs
Type	Bag
Max load	10 kg
Shoulder strap	Yes



TOOL

Tool backpack

11-25-13

- One of 9 sizes/variants in the Inforce "Tool" family – see the full range table for the rest
- Packed 4 pcs per carton

Volume/Capacity	25 l
Dimensions (unpacked)	360x200x470 mm
Net weight	1.9 kg
Material	Polyester
Material	Polyester
Height	470 mm
Width	200 mm
External pockets	4 pcs
Compartments	3 pcs
Type	Backpack
Application	For tool



TOOL

Tool organiser bag

11-25-14

- One of 9 sizes/variants in the Inforce "Tool" family – see the full range table for the rest
- Packed 4 pcs per carton

Type	Bag
Max load	7.5 kg
Material	Ballistic nylon
Shoulder strap	Yes
Pockets	29
Plastic base	Yes
Compartments	1
Colour	Black/yellow



WHEELED

Wheeled tool bag

11-25-17

- One of 2 sizes/variants in the Inforce "Wheeled" family – see the full range table for the rest
- Packed 2 pcs per carton

Type	Bag
Max load	30 kg
Material	Composite
Metal handle	Yes
Wheels	Yes
Pockets	27
Rigid frame	Yes
Compartments	1
Colour	Black/yellow



2-COMPARTMENT

2-compartment tool box

06-20-20

- Standalone item in the Inforce consumables/hand tools range
- Packed 2 pcs per carton

Volume/Capacity	18 l
Length	526 mm
Net weight	7.5 kg
Height	288 mm
Width	347 mm
Material	Polypropylene
Lock/latch material	ABS-Plastic
Grade	Professional
Handle material	Plastic
Application	For tool



8-COMPARTMENT

8-compartment professional organiser with metal latches

06-20-16

- Standalone item in the Inforce consumables/hand tools range
- Packed 16 pcs per carton

Length	374 mm
Net weight	1.17 kg
Width	228 mm
Height	83 mm
Material	Plastic
Lock/latch material	Plastic
Handle material	Plastic
Grade	Household
Compartments	8



MEDIUM

Medium stackable box, MODULAR SYSTEM

06-20-17

- Standalone item in the Inforce consumables/hand tools range
- Packed 2 pcs per carton

Volume/Capacity	32 l
Length	525 mm
Net weight	4.98 kg
Height	335 mm
Width	370 mm
Material	Plastic
Lock/latch material	Metal
Grade	Professional
Handle material	Plastic
Application	For power tools



IMPACT-RESISTANT

Impact-resistant tool box

06-20-14

- Standalone item in the Inforce consumables/hand tools range
- Packed 2 pcs per carton

Volume/Capacity	15.89 l
Length	415 mm
Dimensions (unpacked)	415x325x170 mm
Net weight	2.7 kg
Material	Plastic
Handle material	Plastic
Lock/latch material	Plastic
Height	170 mm
Width	325 mm
Grade	Professional



METAL-AND-PLASTIC

Metal-and-plastic tool box 20"

06-20-08

- One of 2 sizes/variants in the Inforce "Metal-And-Plastic" family – see the full range table for the rest
- Packed 4 pcs per carton

Volume/Capacity	27 l
Length	500 mm
Net weight	2.38 kg
Height	233 mm
Width	232 mm
Material	Metal-plastic
Lock/latch material	Metal
Grade	Professional
Handle material	Metal
Application	For manual tool



METAL-AND-PLASTIC

Tool Box, 24", Metal-and-Plastic, on Wheels

06-20-09

- Large wheeled tool box with a metal-reinforced frame
- Smaller 20"/21"/26" boxes and organisers also available – see the full range table

Volume/Capacity	92.88 l
Length	600 mm
Dimensions (unpacked)	600x360x430 mm
Net weight	6.5 kg
Material	Metal-plastic
Handle material	Metal/Plastic
Lock/latch material	Metal
Height	430 mm
Width	360 mm
Grade	Professional



PROFESSIONAL ORGANISER

Professional organiser with metal latches 9 compartments

06-20-10

- Standalone item in the Inforce consumables/hand tools range
- Packed 8 pcs per carton

Length	430 mm
Net weight	2.07 kg
Width	360 mm
Height	110 mm
Material	Plastic
Lock/latch material	Metal
Handle material	Plastic
Grade	Professional
Compartments	9



STACKABLE

Stackable Case, MODULAR SYSTEM

06-20-12

- Stackable storage case compatible with the MODULAR SYSTEM platform
- Matching boxes, organisers, a trolley and a wheeled case complete the platform – see the full range table

Volume/Capacity	35 l
Length	528 mm
Net weight	4.2 kg
Height	179 mm
Width	371 mm
Material	Plastic
Lock/latch material	Metal
Grade	Professional
Handle material	Plastic
Application	For manual tool



STACKABLE

Stackable organiser, MODULAR SYSTEM

06-20-18

- One of 2 sizes/variants in the Inforce "Stackable" family – see the full range table for the rest
- Packed 4 pcs per carton

Length	530 mm
Net weight	3.2 kg
Width	370 mm
Height	130 mm
Material	Plastic
Lock/latch material	Metal
Handle material	Plastic
Grade	Professional
Compartments	12
Application	For small parts/fasteners



SYSTEM

System storage tool 3 in 1

06-20-19

- Standalone item in the Inforce consumables/hand tools range
- Packed individually

Volume/Capacity	147 l
Length	570 mm
Net weight	15.7 kg
Height	700 mm
Width	370 mm
Material	Plastic
Lock/latch material	Metal
Grade	Professional
Handle material	Plastic
Application	For manual tool



WHEELED

Wheeled stackable box, MODULAR SYSTEM

06-20-13

- One of 2 sizes/variants in the Inforce "Wheeled" family – see the full range table for the rest
- Packed 2 pcs per carton

Volume/Capacity	80 l
Length	412 mm
Net weight	8.47 kg
Height	562 mm
Width	374 mm
Material	Plastic
Lock/latch material	Metal
Grade	Professional
Handle material	Plastic
Application	For manual tool



TROLLEY

Trolley for MODULAR SYSTEM Boxes

06-20-21

- Wheeled trolley base for the MODULAR SYSTEM storage platform
- Compatible with all MODULAR SYSTEM boxes, cases and organisers – see the full range table

Volume/Capacity	0 l
Length	590 mm
Net weight	3.8 kg
Height	185 mm
Width	445 mm
Material	Plastic/Metal
Lock/latch material	Plastic
Grade	Professional
Application	For tool
Form factor	Connecting plate

DIGITAL

01-05-13	Digital auto-range clamp meter
06-11-39	Digital caliper 0-150mm/0-6"0.01mm/0.0005"
06-11-45	Digital micrometer 25-50mm/1-2"0.001mm/0.00005"
01-05-06	Digital multimeter
01-05-08	Digital multimeter
01-05-09	Digital multimeter
01-05-10	Digital multimeter

MAGNETIC

06-11-059	Magnetic level 1200mm
06-11-060	Magnetic level 1500mm
06-11-061	Magnetic level 1800mm
06-11-055	Magnetic level 400mm
06-11-056	Magnetic level 600mm
06-11-057	Magnetic level 800mm

OPEN

11-25-16	Open tool bag 18"
----------	-------------------

POLYMER

06-11-84	Polymer clamping square, 80x50
----------	--------------------------------

ROOFING

06-11-76	Roofing square with protractor 190 mm
----------	---------------------------------------

SPIRIT

06-11-57	Spirit level 800mm
----------	--------------------

SQUARE

06-11-67	Square with level 300 mm
----------	--------------------------

TAPE

06-11-88	Tape measure 5m x 25mm
06-11-83	Tape measure 7.5 m x 27 mm
06-11-47	Tape measure 7.5x27mm with nylon belt and magnetic hook
06-11-49	Tape measure 7.5x27mm with nylon hi-vis coating and magnetic hook
06-11-78	Tape measure with triple stop 10x25
06-11-70	Tape measure with triple stop 5x19
06-11-71	Tape measure with triple stop 5x25

TOOL

11-25-19	Tool bag 20" – stackable, MODULAR SYSTEM compatible
06-20-07	Tool box 18 metal
06-20-11	Tool box 20-inch, with organisers
06-20-05	Tool box 21 with metal latches
06-20-04	Tool box 24.5 with 2 organisers
06-20-06	Tool box 26 with metal latches

INFORCE



SECTION / 05

MACHINERY & WORKSHOP EQUIPMENT

Tile and stone cutters, rebar processing machines, bench vices, and workshop lifting equipment



LOCKSMITH VISES
Swivelling locksmith vise 115mm
05-23-09

- High-strength cast iron body, 360° swivel
- Clamping force 38.2 kN, chip-protected screw

Working stroke	115 mm
Clamping force	38200 N
Dimensions (unpackaged)	192x360x200
Net weight	18.2 kg
Jaw width	115 mm
Housing material	Cast iron
Jaw material	Steel
Grade	Professional
Type	Machinist's (bench)
Mounting method	Screws/bolts



LOCKSMITH VISES
Swivelling locksmith vise 140mm
05-23-10

- High-strength cast iron body, 360° swivel
- Clamping depth 98 mm for large workpieces

Type	Machinist's (bench) vice
Jaw width	140 mm
Working stroke	140 mm
Swivel base	Yes
Body material	Cast iron
Jaw material	Steel
Anvil	Yes
Clamping force	4000 N
Pipe clamp	Yes
Mounting	Screws/bolts



LOCKSMITH VISES
Swivelling locksmith vise 165mm
05-23-11

- High-strength cast iron body, 360° swivel
- Clamping force 44.1 kN, chip-protected screw

Working stroke	165 mm
Clamping force	44100 N
Dimensions (unpackaged)	225x440x240
Net weight	30.8 kg
Jaw width	165 mm
Housing material	Cast iron
Jaw material	Steel
Grade	Professional
Type	Machinist's (bench)
Mounting method	Screws/bolts



LOCKSMITH VISES
Swivelling locksmith vise 200mm
05-23-12

- High-strength cast iron body, 360° swivel
- Clamping force 55 kN, chip-protected screw

Type	Machinist's (bench) vice
Jaw width	200 mm
Working stroke	205 mm
Swivel base	Yes
Body material	Cast iron
Jaw material	Steel
Anvil	Yes
Clamping force	55000 N
Pipe clamp	Yes
Mounting	Screws/bolts



LOW-PROFILE

08-08-75

- Low-profile trolley jack 3 tonnes, height pickup height 75mm, height lift height 505mm
- One of 2 sizes/variants in the Inforce "Low-Profile" family – see the full range table for the rest

Packed individually	108 mm
Support diameter	108 mm
Working stroke	430 mm
Handle length	1250 mm
Dimensions (unpacked)	670x330x1400 mm
Net weight	36.1 kg
Min lift height	75 mm
Max lift height	505 mm
Housing material	Metal
Grade	Professional



LOW-PROFILE

Low-Profile Trolley Jack, 3.5 t

08-08-95

- Low-profile trolley jack, 95 mm pickup height, 550 mm max lift
- A 3-tonne version, a motorcycle lift and grease guns also available – see the full range table

Support diameter	108 mm
Working stroke	457 mm
Handle length	1250 mm
Dimensions (unpacked)	2000x180x385 mm
Net weight	46.6 kg
Min lift height	95 mm
Max lift height	550 mm
Housing material	Metal
Grade	Professional



MOTORCYCLE

Motorcycle trolley lift 0.5 tonnes

08-08-77

- Standalone item in the Inforce consumables/hand tools range
- Packed individually

Dimensions (unpacked)	925x480x150 mm
Net weight	38.5 kg
Min lift height	121 mm
Max lift height	415 mm
Housing material	Steel
Grade	Professional
Jack type	Low-profile trolley
Drive type	Hydraulic
Load capacity	0.5 t
Lock	Yes



REBAR

Rebar bending machine G-40

32-25-001

- One of 3 sizes/variants in the Inforce "Rebar" family – see the full range table for the rest

Type	Rebar bender
Motor power	4 kW
Drive type	Electric
Voltage	380 V
Max rebar diameter	40 mm
Disc speed	8 rpm
Dimensions (unpacked)	850x730x800 mm
Net weight	320 kg



REBAR

Rebar cutting machine R-52

32-25-005

- One of 3 sizes/variants in the Inforce "Rebar" family – see the full range table for the rest



REBAR

Rebar Cutting Machine, R-40

32-25-003

- Electric rebar cutting machine for reinforcement bar up to 40 mm
- A bending machine (G-40) and a larger R-52 cutter are also available – see the full range table

Voltage	380 V
Engine/motor power	3 kW
Rebar diameter	40 mm
Net weight	400 kg
Dimensions (unpacked)	1330x425x720 mm
Grade	Professional
Kind	For cutting rebar
Drive type	Electric
Engine	Electric, 3 kW



STONE CUTTING MACHINES

Stone cutting machine

05-13-40

- 350 mm disc included, water supply to cut zone
- Powerful 2200 W motor, vertical carriage travel

Power	2200 W
Voltage	220 V
Bore diameter	25.4 mm
Disc diameter	350 mm
Disc diameter (inch)	14
Cut length	800 mm
Max cutting depth at 90°	100 mm
Max cutting depth at 45°	65 mm
Vertical carriage travel	Yes
Net weight	75 kg



STONE CUTTING MACHINES

Stone cutting machine

05-13-41

- 400 mm disc included, water supply to cut zone
- Powerful 2200 W motor, rolling table

Power	2200 W
Voltage	220 V
Bore diameter	25.4 mm
Disc diameter	400 mm
Disc diameter (inch)	16
Cut length	900 mm
Max cutting depth at 90°	110 mm
Max cutting depth at 45°	70 mm
Vertical carriage travel	Yes
Net weight	83 kg



TILE CUTTERS
Electric tile cutter

- 05-13-05**
- Professional performance in every move
 - Innovative solutions for comfortable work

Power	3000 W
Voltage	220 V
Material	All tile types
Spindle speed	6500 rpm
Bore diameter	22.2 mm
Disc diameter	160 mm
Worktable size	1800x500 mm
Cutting length	1200 mm
Angled (mitre) cuts	Yes
Max cutting depth at 90°	30 mm



TILE CUTTERS
Electric tile cutter

- 05-13-06**
- Perfect cut with minimal effort
 - Automatic broaching, performance optimization

Power	3000 W
Voltage	220 V
Bore diameter	22.2 mm
Disc diameter	160 mm
Disc diameter (inch)	6 1/4
Cut length	1200 mm
Max cutting depth at 90°	30 mm
Max cutting depth at 45°	20 mm
Vertical carriage travel	Yes
Dimensions (unpacked)	1860x490x645 mm



TILE CUTTERS
Rail tile cutter 1200mm

- 05-13-37**
- All-metal 20 mm guides, anti-corrosion coated
 - Carriage on linear bearings, aluminum worktable

Depth of cut	15 mm
Cutting length	1250 mm
Cutting element	Roller, d22 mm
Laser pointer	Yes



TILE CUTTERS
Rail tile cutter 800mm

- 05-13-36**
- All-metal 20 mm guides, anti-corrosion coated
 - Carriage on linear bearings for smoother glide

Depth of cut	15 mm
Cutting length	800 mm
Cutting element	Roller, d22 mm
Laser pointer	Yes



TILE CUTTERS

Tile cutter rail

05-13-16

- Six-bearing carriage encloses the rail both sides
- Laser pointer + ruler for accurate cuts

Roller outer diameter	22 mm
Roller inner diameter	6 mm
Cutting depth	16 mm
Cut length	800 mm
Net weight	6.2 kg
Dimensions (unpacked)	1040x200x220
Roller thickness	6 mm
Material worked	Ceramic Tile
Grade	Professional
Type	Rail tile cutter



TILE CUTTERS

Tile cutter rail

05-13-17

- Six-bearing carriage for a smooth glide
- Laser pointer + ruler for accurate cuts

Roller outer diameter	22 mm
Roller inner diameter	6 mm
Cutting depth	16 mm
Cut length	1000 mm
Net weight	7.2 kg
Dimensions (unpacked)	1240x200x220 mm
Roller thickness	6 mm
Material worked	Ceramic Tile
Grade	Professional
Type	Rail tile cutter



TILE CUTTERS

Tile cutter rail

05-13-18

- Six-bearing carriage encloses the rail
- Laser pointer + ruler for accurate cuts

Roller outer diameter	22 mm
Roller inner diameter	6 mm
Cutting depth	16 mm
Cut length	1200 mm
Net weight	8 kg
Dimensions (unpacked)	1440x200x220 mm
Roller thickness	6 mm
Material worked	Ceramic Tile
Grade	Professional
Type	Rail tile cutter

INFORCE



SECTION / 06

POWER EQUIPMENT

Compressors and pneumatic tools, generators, and welding equipment for jobsite and workshop power



AUTOMATIC TRANSFER

Automatic transfer switch

IATS 25400D

- One of 5 sizes/variants in the Inforce "Automatic Transfer" family – see the full range table for the rest



AUTOMATIC TRANSFER

Automatic transfer switch

IATS 25400S

- One of 5 sizes/variants in the Inforce "Automatic Transfer" family – see the full range table for the rest

Type	Automatic transfer switch (ATS)
Voltage	380 V
Max power	10 kW
Max current	25 A
Rated current	25 A
Operating temperature	-20 to +55 °C
Dimensions (unpackaged)	350x245x147 mm
Net weight	5.1 kg



AUTOMATIC TRANSFER

Automatic transfer switch ATSL

04-03-19

- One of 5 sizes/variants in the Inforce "Automatic Transfer" family – see the full range table for the rest
- Packed individually

Voltage	220 V
Max power	11 kW
Rated current	50 A
Operating temperature range	-20 to +40 °C
Net weight	5.6 kg



DIESEL GENERATORS

Three-phase diesel generator

IDGL 11000-3

- Digital display, automation-unit ready
- Low-oil-level shutdown protection

Voltage	220/380
Max power	11.2 kW
Max power at 220 V	3.6 kW
Max power at 380 V	11.2 kW
Rated power at 220 V	3.4 kW
Rated power at 380 V	10 kW
Engine/motor power	16,8 hp / 12,5 kW
Fuel tank capacity	25 l
Oil tank capacity	3 l
Engine displacement	954 cm ³



DIESEL GENERATORS

Three-phase diesel generator

IDGL 6000-3

- Digital display, AVR system
- Cold-start intake air-heating system

Voltage	220/380
Max power	5.6 kW
Max power at 220 V	1.9 kW
Max power at 380 V	5.6 kW
Rated power at 220 V	1.7 kW
Rated power at 380 V	5 kW
Engine/motor power	8,4 hp / 6,3 kW
Fuel tank capacity	12.5 l
Oil tank capacity	1.65 l
Engine displacement	474 cm³



GASOLINE GENERATORS

Gasoline generator

04-03-07

- Top-mounted fuel tank, dust/moisture socket covers
- AVR voltage regulation, vibration-resistant frame

Voltage	220 V
Starter	Recoil/electric
Max power	6.5 kW
Rated power at 220 V	6 kW
Alternator	Synchronous
Fuel tank capacity	25 l
Engine type	4-stroke
Grade	Professional
Dimensions (LxWxH)	815x525x545 mm
Net weight	90 kg



GASOLINE GENERATORS

Gasoline generator

04-03-05

- Top-mounted fuel tank for easy refuelling
- AVR voltage regulation, short-circuit protection

Voltage	220 V
Starter	Recoil
Max power	5.5 kW
Rated power at 220 V	5 kW
Alternator	Synchronous
Fuel tank capacity	25 l
Engine type	4-stroke
Grade	Professional
Dimensions (LxWxH)	695x525x545 mm
Net weight	82 kg



GASOLINE GENERATORS

Gasoline generator

04-03-15

- Copper alternator winding, compact body
- Resource: 3000 m/h, four-stroke engine

Voltage	220 V
Max power	6.5 kW
Max power at 220 V	6.5 kW
Rated power at 220 V	6 kW
Engine/motor power	12 hp
Fuel tank capacity	20 l
Speed	3600 rpm
Engine displacement	420 cm³
Oil tank capacity	1.1 l
Electrical outlets 380/220/12 V	-/2/1



GASOLINE GENERATORS

Gasoline generator

04-03-16

- Copper alternator winding, battery included
- Compact body, reliable & long service life

Voltage	220 V
Max power	8 kW
Max power at 220 V	8 kW
Rated power at 220 V	7.5 kW
Engine/motor power	17 hp
Fuel tank capacity	25 l
Speed	3600 rpm
Engine displacement	459 cm³
Oil tank capacity	1.1 l
Electrical outlets 380/220/12 V	-/2/1



GASOLINE GENERATORS

Gasoline generator

04-03-17

- Battery included, compact and light
- Reliable four-stroke powerful engine

Voltage	220 V
Max power	7.5 kW
Max power at 220 V	7.5 kW
Rated power at 220 V	7 kW
Engine/motor power	14.5
Fuel tank capacity	25 l
Speed	3600 rpm
Engine displacement	439 cm³
Oil tank capacity	1.1 l
Electrical outlets 380/220/12 V	-/2/1



GASOLINE GENERATORS

Gasoline generator

04-03-21

- Powerful engine, large fuel tank
- AVR voltage monitoring protects devices

Voltage	220 V
Max power	5.5 kW
Max power at 220 V	5.5 kW
Rated power at 220 V	5 kW
Engine/motor power	11
Fuel tank capacity	20 l
Speed	3600 rpm
Engine displacement	420 cm³
Oil tank capacity	1.1 l
Electrical outlets 380/220/12 V	-/2/1



GASOLINE GENERATORS

Gasoline generator

04-03-18

- Large fuel tank, powerful engine
- AVR voltage monitoring, compact body

Voltage	220 V
Max power	3 kW
Max power at 220 V	3 kW
Rated power at 220 V	2.8 kW
Engine/motor power	7 l/with
Fuel tank capacity	15 l
Speed	3600 rpm
Engine displacement	208 cm³
Oil tank capacity	0.6 l
Electrical outlets 380/220/12 V	-/2/1



GASOLINE GENERATORS

Gasoline generator

GL 3000E

- Large fuel tank, powerful engine
- AVR voltage monitoring, electric starter

Voltage	220 V
Max power	3 kW
Max power at 220 V	3 kW
Rated power at 220 V	2.8 kW
Engine/motor power	7 l/with
Fuel tank capacity	15 l
Speed	3600 rpm
Engine displacement	208 cm³
Oil tank capacity	0.6 l
Electrical outlets 380/220/12 V	-/2/1



GASOLINE GENERATORS

Three-phase gasoline generator

GL 8500E-3D

- Intelligent module with multi-function display
- Electronic ignition, ~9 hours autonomous operation

Voltage	220/380
Max power	8.3 kW
Rated power at 220 V	7.8 kW
Rated power at 380 V	7.5 kW
Max power at 380 V	8.3 kW
Max power at 220 V	8.3 kW
Engine/motor power	10.3 kW / 14 hp
Fuel tank capacity	25 l
Speed	3000 rpm
Oil tank capacity	1.1 l



GASOLINE GENERATORS

Three-phase gasoline generator

GL 6500E-3

- Metal frame and handle, treaded wheels
- Copper alternator winding, long service life

Voltage	220/380
Max power	6.5 kW
Rated power at 220 V	2 kW
Rated power at 380 V	6 kW
Max power at 380 V	6.5 kW
Max power at 220 V	2.1 kW
Engine/motor power	11 kW/15 hp
Fuel tank capacity	25 l
Speed	3000 rpm
Oil tank capacity	1.1 l



INVERTER GENERATORS

Inverter generator

04-03-23

- Original Japanese Yamaha engine
- Noise-proof impact-resistant housing

Voltage	220 V
Max power	2 kW
Max power at 220 V	2 kW
Rated power at 220 V	1.8 kW
Engine/motor power	2.45 hp(1.8 kW)
Speed	3300 rpm
Engine displacement	79 cm³
Fuel tank capacity	3.9 l
Oil tank capacity	0.4 l
Electrical outlets 380/220/12 V	0/2/1



INVERTER GENERATORS
Inverter generator

IGC 1000

- Parallel operation of two generators possible
- Display: engine hours, frequency, voltage

Voltage	220 V
Max power	1 kW
Rated power at 220 V	0.9 kW
Engine power	1.6 hp
Speed	4200 rpm
Engine displacement	53 cm³
Fuel tank capacity	2.1 l
Fuel consumption	0.8 l/h
Noise level	65 dB
Protection class	IP23



INVERTER GENERATORS
Inverter generator

IGC 2200

- Copper alternator windings
- Digital display: voltage, frequency, hours, RPM

Voltage	220 V
Max power	2.2 kW
Max power at 220 V	2.2 kW
Rated power at 220 V	2 kW
Rated power at 380 V	0 kW
Engine/motor power	3 hp
Speed	4800 rpm
Engine displacement	79.5 cm³
Fuel tank capacity	3.9 l
Oil tank capacity	0.35 l



WELDING GENERATORS
Welding generator

04-03-22

- Handy panel, stable welding current
- Powerful, stable motor operation

Voltage	220 V
Max power	5 kW
Max power at 220 V	5 kW
Rated power at 220 V	4.5 kW
Engine/motor power	15 hp
No-load voltage	75 V
Arc voltage	27 V
Fuel tank capacity	25 l
Engine displacement	420 cm³
Electrode/wire diameter	1,6-5/0



COMPRESSORS
Belt-driven compressor

04-06-30

- Generates large volumes of compressed air
- Two outputs - connect up to 2 pneumatic tools

Voltage	220 V
Operating pressure	8 bar
Motor speed	2800 rpm
Free air delivery (input)	450 l/min
Free air delivery (output)	360 l/min
Receiver volume	50 l
Compressor type	Belt-driven
Power	2.2 kW
Transport wheels	Yes
Lubrication	Oil-lubricated



COMPRESSORS

Belt-driven compressor

04-06-31

- Large-volume compressed air production, 220V
- Connect up to 2 pneumatic tools simultaneously

Voltage	220 V
Power (kW)	2.3
Power (hp)	3
Working pressure	10 bar
Speed	2850 rpm
Connection diameter	1/4"
Receiver tank volume	100 l
Number of outlets	2
Dimensions (unpacked)	1050x420x830 mm
Net weight	67 kg



COMPRESSORS

Belt-driven compressor

BCX-200L

- Sufficient for simultaneous small tool operation
- 200-liter receiver for uninterrupted operation

Voltage	220 V
Power (kW)	2.2
Power (hp)	3
Working pressure	10 bar
Speed	2890 rpm
Connection diameter	1/4"
Receiver tank volume	200 l
Number of outlets	1
Dimensions (unpacked)	1370x580x950 mm
Net weight	123 kg



COMPRESSORS

Belt-driven compressor

IBCV-100L-3P/420

- High outlet pressure, powerful 2.2 kW motor
- Hundred-liter receiver, high capacity - 420 min

Voltage	380 V
Power (kW)	2.2
Power (hp)	2.992
Working pressure	10 bar
Speed	2953 rpm
Connection diameter	1/4"
Receiver tank volume	100 l
Number of outlets	1
Dimensions (unpacked)	1160x410x870 mm
Net weight	88 kg



COMPRESSORS

Belt-driven compressor

IBCW-100L-3P/580

- Powerful 3 kW motor, high outlet pressure
- Hundred-liter receiver, ease of operation

Voltage	380 V
Power (kW)	3
Power (hp)	4.08
Working pressure	10 bar
Speed	2850 rpm
Connection diameter	1/4"
Receiver tank volume	100 l
Number of outlets	2
Dimensions (unpacked)	1160x410x870 mm
Net weight	105 kg



COMPRESSORS

Belt-driven compressor

IBCW-100L-3P/950

- Powerful 5.5 kW motor, pressure gauges
- High-quality performance, high capacity - 950 l/min

Voltage	380 V
Power (kW)	5.5
Power (hp)	7.48
Working pressure	10 bar
Speed	2953 rpm
Connection diameter	1/4"
Receiver tank volume	100 l
Number of outlets	1
Dimensions (unpacked)	1150x670x900 mm
Net weight	143 kg



COMPRESSORS

Belt-driven compressor

IBCH-200L-3P/690

- Metal structure with corrosion protection
- Thermal protection against overloads

Voltage	380 V
Power (kW)	4
Power (hp)	5.44
Working pressure	10 bar
Speed	2953 rpm
Connection diameter	1/4"
Receiver tank volume	200 l
Number of outlets	2
Dimensions (unpacked)	1500x520x990 mm
Net weight	126 kg



COMPRESSORS

Belt-driven compressor

IBCW-270L-3P/950

- For small enterprises and everyday life
- 270-liter receiver for a reliable air reserve

Voltage	380 V
Power (kW)	5.5
Power (hp)	7.5
Working pressure	10 bar
Speed	2890 rpm
Connection diameter	1/4"
Receiver tank volume	270 l
Number of outlets	2
Dimensions (unpacked)	1650x510x1150 mm
Net weight	195 kg



COMPRESSORS

Belt-driven compressor

IBCV-500L-3P2/1400

- Powers a wide range of pneumatic equipment
- Resistant to overloads and high ambient temperature

Voltage	380 V
Power (kW)	7.5
Power (hp)	10.2
Working pressure	12 bar
Speed	2890 rpm
Connection diameter	3/4"
Receiver tank volume	500 l
Number of outlets	1
Dimensions (unpacked)	1980x610x1250 mm
Net weight	350 kg



COMPRESSORS

Belt-driven compressor

IBCW-500L-3P/950

- Belt-driven, high-capacity three-cylinder airend
- Belt drive covered with protective grille

Voltage	380 V
Power (kW)	5.5
Power (hp)	7.48
Working pressure	10 bar
Speed	2953 rpm
Connection diameter	1/4"
Receiver tank volume	500 l
Number of outlets	2
Dimensions (unpacked)	2000x610x1250 mm
Net weight	230 kg



COMPRESSORS

Belt-driven compressor

BCX-200L-3P

- For painting, tire inflation, filter purging
- 200-liter receiver reduces operating cycle intensity

Voltage	380 V
Power (kW)	3
Power (hp)	4
Working pressure	10 bar
Speed	2890 rpm
Connection diameter	1/4"
Receiver tank volume	200 l
Number of outlets	2
Dimensions (unpacked)	1370x580x950 mm
Net weight	133 kg



COMPRESSORS

Compressor

04-06-23

- 100-liter receiver for extended cycles
- 10 bar operating pressure

Voltage	220 V
Operating pressure	10 bar
Motor speed	2850 rpm
Free air delivery (input)	410 l/min
Free air delivery (output)	300 l/min
Receiver volume	100 l
Compressor type	Piston, coaxial (direct drive)
Power	2.2 kW
Transport wheels	Yes
Lubrication	Oil-lubricated



COMPRESSORS

Compressor

04-06-20

- Compact 24-liter receiver
- Direct-drive piston coaxial design

Voltage	220 V
Power (kW)	1.8
Power (hp)	2.5
Working pressure	8 bar
Speed	2850 rpm
Connection diameter	1/4"
Receiver tank volume	24 l
Number of outlets	2
Net weight	26.4 kg
Dimensions (unpacked)	590x285x630



COMPRESSORS

Compressor

04-06-21

- Reliable direct-drive piston compressor
- Compact receiver for workshop or garage

Voltage	220 V
Power (kW)	1.8
Power (hp)	2.5
Working pressure	8 bar
Speed	2850 rpm
Connection diameter	1/4"
Receiver tank volume	50 l
Number of outlets	2
Net weight	33 kg
Dimensions (unpacked)	770x330x740



COMPRESSORS

Compressor

04-06-22

- 10 bar operating pressure for demanding tools
- Direct-drive piston coaxial design

Voltage	220 V
Operating pressure	10 bar
Motor speed	2850 rpm
Free air delivery (input)	410 l/min
Free air delivery (output)	274 l/min
Receiver volume	50 l
Compressor type	Piston, coaxial (direct drive)
Power	2.2 kW
Transport wheels	Yes
Lubrication	Oil-lubricated



COMPRESSORS

Oil-free compressor

04-06-32

- Traction handle and large wheels for easy transport
- Drain valve for quick condensate removal

Operating pressure	8 bar
Input Performance	220 l/min
Receiver Volume	24 l
Compressor type	Piston Coaxial (Direct Drive)



COMPRESSORS

Oil-free compressor

04-06-33

- Continuous, oil-free operation
- Low noise, high rubbing life

Voltage	220 V
Power (kW)	1.8
Power (hp)	2.448
Working pressure	8 bar
Speed	2850 rpm
Connection diameter	1/4"
Receiver tank volume	50 l
Net weight	33.8 kg
Dimensions (unpacked)	755x380x725 mm
Number of outlets	2



COMPRESSORS

Oil-free compressor

OCX-24L-O

- Continuous operation, no oil needed
- Air without oil emulsion at the outlet

Voltage	220 V
Power (kW)	1.2
Power (hp)	2
Working pressure	8 bar
Speed	2800 rpm
Connection diameter	1/2
Receiver tank volume	24 l
Net weight	20.5 kg
Dimensions (unpacked)	550x250x540 mm
Number of outlets	2



COMPRESSORS

Oil-free compressor

OCX-40L-O

- Individual thermal protection for each head
- 2 pressure gauges for precise monitoring

Voltage	220 V
Power (kW)	1.8
Power (hp)	2.5
Working pressure	8 bar
Speed	2800 rpm
Connection diameter	1/4"
Receiver tank volume	40 l
Net weight	27.5 kg
Dimensions (unpacked)	640x310x590 mm
Number of outlets	2



COMPRESSORS

Oil-free compressor

OCX-45L-O

- Resistant to supply voltage drops (up to 180V)
- Direct and reduced quick-release outlets

Voltage	220 V
Power (kW)	2.9
Power (hp)	4.9
Working pressure	8 bar
Speed	2800 rpm
Connection diameter	1/2
Receiver tank volume	45 l
Net weight	38 kg
Dimensions (unpacked)	680x240x640 mm
Number of outlets	2



OIL-FREE COMPRESSOR

Oil-free compressor

ISWC-100L/720D

- One of 7 sizes/variants in the Inforce "Oil-Free Compressor" family – see the full range table for the rest

Voltage	220 V
Working pressure	8 bar
Compressor type	Piston, coaxial (direct drive)
Power	4.8 kW (6.5 hp)
Receiver volume	100 l
Free air delivery (input)	720 l/min
Free air delivery (output)	432 l/min
Motor speed	2800 rpm
Lubrication	Oil-free
Connector type	Rapid (Euro-type)



INVERTER ARC
Inverter arc welder
IMMA-160S

– One of 3 sizes/variants in the Inforce "Inverter Arc" family – see the full range table for the rest

Voltage	220 V
Max power	4.93 kW
Min current	10 A
Max current	160 A
Mode	DC
Duty cycle	20%
Protection class	IP21
Mains plug included	Yes
TIG welding	Yes
Min input voltage	186 V



INVERTER ARC
Inverter arc welder
IMMA-180S

– One of 3 sizes/variants in the Inforce "Inverter Arc" family – see the full range table for the rest

Voltage	220 V
Max power	5.98 kW
Max current	180 A
Min current	10 A
Mode	DC
Duty cycle	20%
Protection class	IP21
TIG welding	Yes
Min input voltage	186 V
Open-circuit voltage	59 V



INVERTER ARC
Inverter arc welder
IMMA-200S

– One of 3 sizes/variants in the Inforce "Inverter Arc" family – see the full range table for the rest

Voltage	220 V
Max power	6.92 kW
Max current	200 A
Min current	10 A
Mode	DC
Duty cycle	20%
Protection class	IP21
TIG welding	Yes
Min input voltage	186 V
Open-circuit voltage	59 V



PARALLEL
Parallel connection cable
IIGK-01

– Standalone item in the Inforce consumables/hand tools range



PLASMA CUTTING INVERTERS

Plasma cutting inverter

04-08-05

- Guarantees edge quality of 8-12 mm
- SMD assembly with automated quality control

Voltage	220(230)
Max power	6.2 kW
Max pressure	6 bar
Max air flow	200 l/min
Dimensions (unpacked)	432x174x331 mm
Net weight	9.5 kg
Max cutting thickness	15 mm
Grade	Professional
Type	Inverter
Torch/cutter type	31



WELDING INVERTERS

Argon arc welding inverter

04-08-04

Max power	7.5 kW
Voltage	220 V
No-load voltage	60 V
Electrode/wire diameter	4/-
Net weight	16.2 kg
Dimensions (unpacked)	495x240x415 mm
IP rating	IP21S
Grade	Professional
Torch type	26
Max current	200 A
Min current	10 A
Duty cycle at max current	75 %



WELDING INVERTERS

Semi-automatic welding inverter

04-08-03

Max power	7.9 kW
No-load voltage	65 V
Rated input voltage	220 V
Min input voltage	190 V
Max wire diameter	1 mm
Min wire diameter	0.6 mm
Max electrode diameter	5 mm
Min electrode diameter	1 mm
Torch length	3 m
Net weight	11.5 kg
Grade	Professional
IP rating	IP21S



WELDING INVERTERS

Semi-automatic welding inverter

04-08-01

Max power	6.3 kW
No-load voltage	65 V
Rated input voltage	220 V
Min input voltage	190 V
Max wire diameter	1 mm
Min wire diameter	0.6 mm
Max electrode diameter	4 mm
Min electrode diameter	1 mm
Torch length	3 m
Net weight	11.5 kg
Grade	Professional
IP rating	IP21S



WELDING INVERTERS

Semi-automatic welding inverter

04-08-02

Max power	7.1 kW
No-load voltage	65 V
Rated input voltage	220 V
Min input voltage	190 V
Max wire diameter	1 mm
Min wire diameter	0.6 mm
Max electrode diameter	4 mm
Min electrode diameter	1 mm
Torch length	3 m
Net weight	11.5 kg
Grade	Professional
IP rating	IP21S

01-05-04	67	05-13-05	87	06-03-35	65	06-09-76	65	06-11-060	82
01-05-05	67	05-13-06	87	06-03-36	65	06-09-77	65	06-11-061	82
01-05-06	82	05-13-08	25	06-03-40	46	06-09-78	65	06-11-062	74
01-05-07	68	05-13-09	26	06-03-41	46	06-09-79	65	06-11-64	71
01-05-08	82	05-13-10	26	06-03-42	50	06-09-80	65	06-11-65	72
01-05-09	82	05-13-16	88	06-03-43	49	06-09-81	65	06-11-66	72
01-05-10	82	05-13-17	88	06-03-45	47	06-09-84	39	06-11-67	82
01-05-11	67	05-13-18	88	06-03-46	65	06-09-85	65	06-11-68	70
01-05-12	67	05-13-36	87	06-03-47	38	06-09-86	65	06-11-69	73
01-05-13	82	05-13-37	87	06-03-48	48	06-09-87	41	06-11-70	82
01-13-01	60	05-13-40	86	06-03-51	65	06-09-88	41	06-11-71	82
01-13-02	59	05-13-41	86	06-03-52	50	06-09-89	65	06-11-72	75
01-13-04	60	05-13-42	30	06-03-53	65	06-09-90	65	06-11-73	75
01-13-10	61	05-13-43	30	06-03-54	50	06-09-91	39	06-11-74	75
01-13-11	58	05-23-09	84	06-04-01	38	06-09-93	40	06-11-75	72
01-13-12	59	05-23-10	84	06-04-02	61	06-11-36	68	06-11-76	82
04-03-05	91	05-23-11	84	06-05-111	65	06-11-37	68	06-11-77	73
04-03-07	91	05-23-12	84	06-05-112	65	06-11-38	68	06-11-78	82
04-03-15	91	06-02-08	63	06-05-113	65	06-11-39	82	06-11-79	72
04-03-16	92	06-02-10	63	06-05-114	43	06-11-40	69	06-11-80	71
04-03-17	92	06-02-12	50	06-05-115	43	06-11-41	69	06-11-81	70
04-03-18	92	06-02-13	65	06-05-116	65	06-11-42	69	06-11-82	76
04-03-19	90	06-02-14	63	06-05-117	65	06-11-43	70	06-11-83	82
04-03-21	92	06-02-16	62	06-09-54	42	06-11-44	69	06-11-84	82
04-03-22	94	06-02-17	65	06-09-55	42	06-11-45	82	06-11-85	71
04-03-23	93	06-03-21	65	06-09-56	42	06-11-46	76	06-11-86	71
04-06-20	97	06-03-22	65	06-09-59	42	06-11-47	82	06-11-87	70
04-06-21	98	06-03-23	65	06-09-60	43	06-11-48	76	06-11-88	82
04-06-22	98	06-03-24	65	06-09-61	65	06-11-49	82	06-14-07	61
04-06-23	97	06-03-25	49	06-09-62	65	06-11-054	73	06-14-08	61
04-06-30	94	06-03-26	47	06-09-64	65	06-11-55	74	06-14-10	58
04-06-31	95	06-03-27	47	06-09-66	65	06-11-055	82	06-14-11	58
04-06-32	98	06-03-28	47	06-09-67	65	06-11-56	74	06-14-101	38
04-06-33	98	06-03-29	48	06-09-68	65	06-11-056	82	06-14-111	58
04-08-01	101	06-03-30	48	06-09-70	65	06-11-057	82	06-15-03	38
04-08-02	102	06-03-31	48	06-09-71	39	06-11-57	82		
04-08-03	101	06-03-33	49	06-09-73	41	06-11-058	73		
04-08-04	101	06-03-34	49	06-09-74	41	06-11-58	74		
04-08-05	101	06-03-34-2	65	06-09-75	65	06-11-059	82		

06-15-04	39	06-18-50	64	08-08-75	85	11-01-329	20	11-01-447	36
06-15-05	55	06-18-67	65	08-08-77	85	11-01-332	19	11-01-448	36
06-15-07	65	06-18-68	65	08-08-95	85	11-01-370	35	11-01-449	36
06-15-08	55	06-18-69	51	08-09-15	59	11-01-371	35	11-01-450	36
06-15-09	65	06-18-70	53	08-09-16	60	11-01-373	17	11-01-451	36
06-15-11	55	06-18-71	65	08-09-17	60	11-01-375	17	11-01-452	36
06-16-07	54	06-18-72	54	08-09-20	59	11-01-376	35	11-01-453	36
06-16-08	56	06-18-73	65	11-01-027	26	11-01-377	16	11-01-454	36
06-16-09	56	06-19-10	45	11-01-028	35	11-01-378	17	11-01-459	35
06-16-10	65	06-19-11	45	11-01-038	28	11-01-380	18	11-01-460	35
06-16-11	56	06-19-12	46	11-01-039	28	11-01-381	35	11-01-461	35
06-16-12	55	06-19-13	45	11-01-040	35	11-01-382	19	11-01-462	35
06-16-13	56	06-19-14	46	11-01-041	35	11-01-383	17	11-01-463	35
06-16-24	65	06-19-15	44	11-01-042	29	11-01-384	19	11-01-466	35
06-16-25	65	06-19-16	44	11-01-043	36	11-01-387	36	11-01-468	35
06-16-26	57	06-19-17	44	11-01-044	29	11-01-389	36	11-01-470	35
06-16-27	57	06-19-18	45	11-01-045	30	11-01-392	36	11-01-471	35
06-16-28	57	06-19-19	44	11-01-256	36	11-01-393	36	11-01-472	35
06-16-29	57	06-19-20	43	11-01-258	24	11-01-394	36	11-01-473	22
06-18-01	65	06-20-04	82	11-01-259	24	11-01-401-5	22	11-01-475	22
06-18-02	65	06-20-05	82	11-01-260	24	11-01-421	20	11-01-476	23
06-18-03	65	06-20-06	82	11-01-261	23	11-01-429	36	11-01-477	35
06-18-04	53	06-20-07	82	11-01-262	18	11-01-430	36	11-01-478	35
06-18-05	53	06-20-08	79	11-01-263	18	11-01-431	36	11-01-479	35
06-18-06	54	06-20-09	80	11-01-264	18	11-01-432	36	11-01-480	35
06-18-07	54	06-20-10	80	11-01-285	35	11-01-433	36	11-01-481	35
06-18-08	51	06-20-11	82	11-01-286	35	11-01-434	36	11-01-482	35
06-18-17	51	06-20-12	80	11-01-288	16	11-01-435	36	11-01-483	35
06-18-21	34	06-20-13	81	11-01-289	16	11-01-436	36	11-01-484	35
06-18-22	34	06-20-14	79	11-01-290	16	11-01-437	36	11-01-485	35
06-18-36	64	06-20-16	79	11-01-291	35	11-01-438	36	11-01-487	35
06-18-37	64	06-20-17	79	11-01-292	35	11-01-439	36	11-01-488	35
06-18-38	64	06-20-18	80	11-01-293	35	11-01-440	36	11-01-489	21
06-18-42	51	06-20-19	81	11-01-294	35	11-01-441	36	11-01-490	21
06-18-43	52	06-20-20	78	11-01-295	35	11-01-442	36	11-01-491	22
06-18-44	52	06-20-21	81	11-01-297	35	11-01-443	36		
06-18-45	52	06-25-07	40	11-01-326	36	11-01-444	36		
06-18-46	52	06-25-08	40	11-01-327	36	11-01-445	36		
06-18-47	53	06-25-09	40	11-01-328	36	11-01-446	36		

11-01-493	36	11-01-0587	35	11-01-698	36	11-25-20	77	GL 8500E-3D	93
11-01-495	31	11-01-0590	35	11-01-702	35	11-25-136	27	GW 06-11-25	75
11-01-496	31	11-01-0594	35	11-01-703	35	11-25-160	28	GW 06-11-26	76
11-01-497	36	11-01-0595	35	11-01-704	36	11-25-161	27	HG6518	9
11-01-498	36	11-01-0596	35	11-01-705	36	12-23-02	34	HG6520D	9
11-01-499	36	11-01-0597	35	11-01-720	36	12-23-04	33	IATS 25400D	90
11-01-500	36	11-01-600	31	11-01-724	36	12-23-05	33	IATS 25400S	90
11-01-501	36	11-01-601	33	11-01-727	21	12-23-06	32	IBCH-200L-3P/690	96
11-01-502	36	11-01-602	33	11-01-728	21	12-23-07	35	IBCV-100L-3P/420	95
11-01-503	36	11-01-604	36	11-01-729	36	12-23-08	35	IBCV-500L-3P2/1400	96
11-01-504	36	11-01-605	36	11-01-731	29	12-23-09	35	IBCW-100L-3P/580	95
11-01-505	36	11-01-606	36	11-01-738	32	32-25-001	85	IBCW-100L-3P/950	96
11-01-506	36	11-01-608	36	11-01-739	29	32-25-003	86	IBCW-270L-3P/950	96
11-01-507	36	11-01-613	36	11-01-740	32	32-25-005	86	IBCW-500L-3P/950	97
11-01-508	36	11-01-614	34	11-01-901-5	20	AG5007	6	IDGL 6000-3	91
11-01-509	36	11-01-615	36	11-01-902-8	20	AG5008A	6	IDGL 11000-3	90
11-01-510	35	11-01-616	28	11-01-5101	25	AG5015ACS-BL	6	IGC 1000	94
11-01-511	30	11-01-617	35	11-01-5102	25	AG5015ACSV-BL	7	IGC 2200	94
11-01-512	31	11-01-623	23	11-01-5104	26	AG9020	6	IIGK-01	100
11-01-0518	36	11-01-625	35	11-01-5105	27	AG9022S	7	IMMA-160S	100
11-01-0521	36	11-01-626	35	11-01-5106	27	BCX-200L	95	IMMA-180S	100
11-01-0522	36	11-01-629	35	11-02-068	24	BCX-200L-3P	97	IMMA-200S	100
11-01-0523	36	11-01-630	35	11-02-072	25	C4	12	ISWC-100L/720D	99
11-01-0525	36	11-01-632	35	11-03-09	65	CAG125-2-5-BL	14	JS0975FV-T	9
11-01-0526	36	11-01-634	23	11-03-10	62	CB20	11	MS1018EFL	10
11-01-0527	36	11-01-665	36	11-03-10-1	19	CB50	11	MS1018EFL-S	10
11-01-0528	36	11-01-666	36	11-03-11	63	CD60-2-2-BL	12	MS1218EL-S	9
11-01-0529	36	11-01-667	36	11-03-12	62	CID60-2-2-BL	12	OCX-24L-O	99
11-01-0547	35	11-01-669	36	11-03-13	62	CID150-2-4-BL	12	OCX-40L-O	99
11-01-0565	35	11-01-670	36	11-20-350	32	CIW420-2-4-BL	13	OCX-45L-O	99
11-01-0566	35	11-01-673	36	11-25-10	77	CIW850-2-4-BL	13	RD1005RV	8
11-01-0567	35	11-01-677	36	11-25-13	78	CIW1350-0-BL	13	RD1307RV-I	8
11-01-0568	35	11-01-679	36	11-25-14	78	CRH22-2-4-BL	13	RH2608R-P	11
11-01-0571	35	11-01-680	36	11-25-15	77	DH4517	8	RH4014CSV-M	11
11-01-0575	35	11-01-682	36	11-25-16	82	DS1915	7	RS2115V	10
11-01-0576	35	11-01-684	36	11-25-17	78	ES5003V	10	RT3807ACSV	8
11-01-0577	35	11-01-685	36	11-25-18	77	GL 3000E	93	RT7022ASV	7
11-01-0581	35	11-01-696	36	11-25-19	82	GL 6500E-3	93		



INFORCE

PROFESSIONAL. RELIABLE.
DYNAMIC.

DEVELOPMENT DISTRICT, DANYANG CITY JIANGSU PROVINCE, CHINA

skyline-tools.com | +0086-511-86225266 | info@skyline-tools.com